


R&S® FSU Spectrum Analyzer Specifications

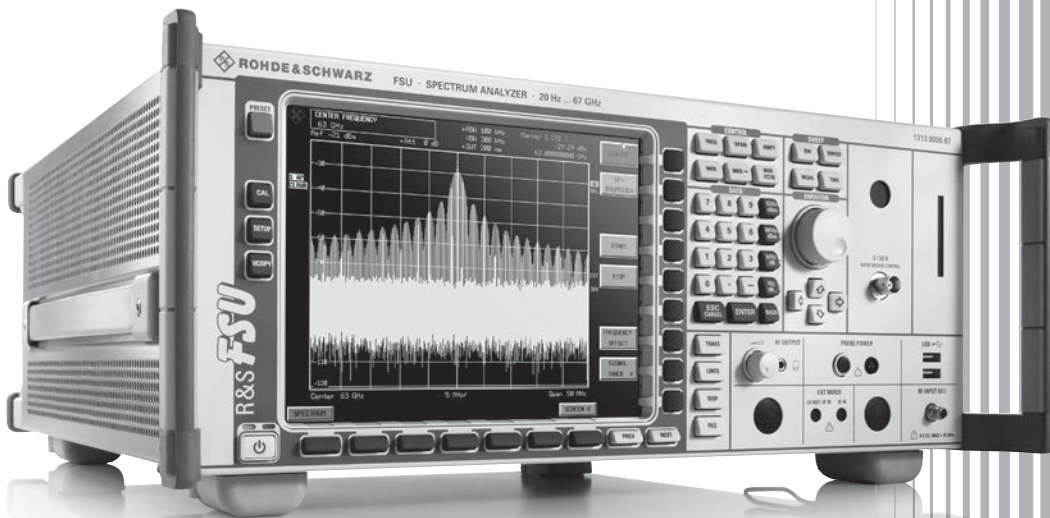

CONTENTS

Specifications	3
Frequency	3
Sweep	4
Resolution bandwidths	4
Level	5
I/Q data	9
Audio demodulation	9
Trigger functions	10
Inputs and outputs (front panel)	10
Inputs and outputs (rear panel)	11
General specifications	12
R&S®FSU-B9 tracking generator, R&S®FSU-B12 attenuator for tracking generator (not available for R&S®FSU67).....	13
R&S®FSU-B21 LO/IF ports for external mixers (for R&S®FSU26/43/46/50/67 only)	15
R&S®FSU-B23 RF preamplifier (for R&S®FSU26 only, requires R&S®FSU-B25 option)	16
R&S®FSU-B24 preamplifier (for R&S®FSU26/43/46/50 only).....	17
R&S®FSU-B25 electronic attenuator and low-noise preamplifier, R&S®FSU-B85 extended specifications for low-noise preamplifier	19
R&S®FSU-B27 broadband FM demodulator output.....	20
Ordering information	21
Options	22
Recommended extras	23

Specifications

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal automatic adjustments performed.

Data without tolerances: typical values only. Data designated "nominal" applies to design parameters and is not tested.


Frequency

Frequency range	R&S®FSU3:	DC coupled	20 Hz to 3.6 GHz
		AC coupled	1 MHz to 3.6 GHz
	R&S®FSU8:	DC coupled	20 Hz to 8 GHz
		AC coupled	1 MHz to 8 GHz
	R&S®FSU26:	DC coupled	20 Hz to 26.5 GHz
		AC coupled	10 MHz to 26.5 GHz
	R&S®FSU43:	DC coupled	20 Hz to 43 GHz
	R&S®FSU46:	DC coupled	20 Hz to 46 GHz
	R&S®FSU50:	DC coupled	20 Hz to 50 GHz
	R&S®FSU67:	DC coupled	20 Hz to 67 GHz
Frequency resolution			0.01 Hz

Reference frequency, internal, nominal	standard OCXO	
Aging per day	after 30 days of continuous operation	1×10^{-9}
Aging per year	after 30 days of continuous operation	1×10^{-7}
Temperature drift	+5 °C to +45 °C	8×10^{-8}
Total error	per year	1.8×10^{-7}
Reference frequency, internal, nominal	R&S®FSU-B4 option	
Aging per day	after 30 days of continuous operation	2×10^{-10}
Aging per year	after 30 days of continuous operation	3×10^{-8}
Temperature drift	+5 °C to +45 °C	1×10^{-9}
Total error	per year	5×10^{-8}
External reference frequency	1 MHz to 20 MHz, 1 Hz steps	

Frequency display		with marker or frequency counter
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Marker tuning frequency stepsize	default	span/624
	marker stepsize = sweep points	span/(sweep points - 1)
Frequency counter resolution	selectable	0.1 Hz to 10 kHz
Count accuracy	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2} (\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		1 %

Spectral purity, SSB phase noise (1 Hz)	f = 640 MHz	
Residual FM	RBW 10 kHz, RMS	< 1 Hz, nominal
Carrier offset	10 Hz	< -73 dBc, nominal
	10 Hz with R&S®FSU-B4 option fitted	< -86 dBc, nominal
	100 Hz	< -98 dBc, typ. -104 dBc
	1 kHz	< -116 dBc, typ. -124 dBc
	10 kHz	< -128 dBc, typ. -133 dBc
	100 kHz	< -128 dBc, typ. -133 dBc
	1 MHz	< -140 dBc, typ. -146 dBc
	10 MHz	typ. -160 dBc

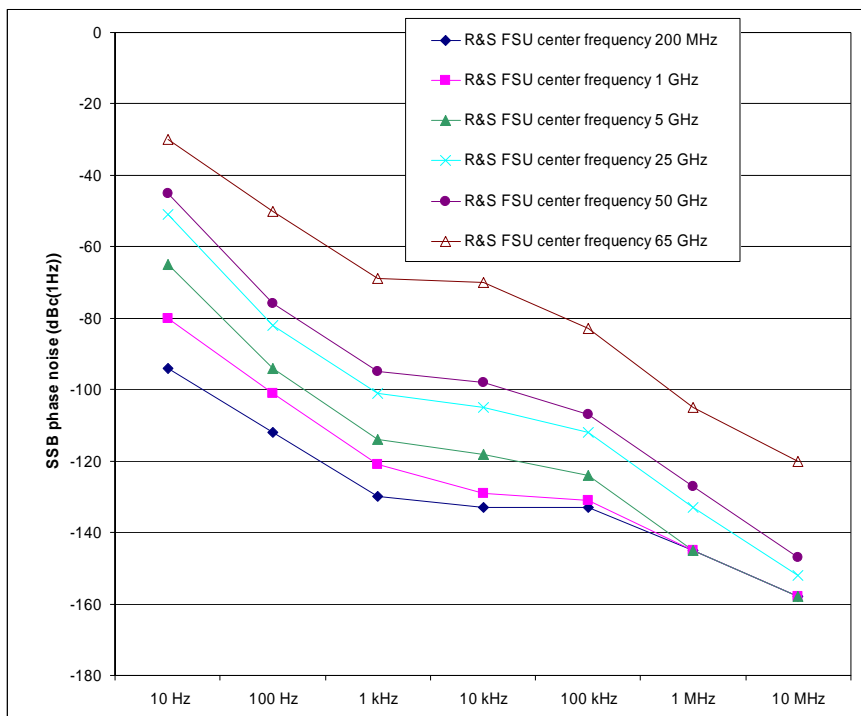

Sweep

Sweep time	time sweep, span = 0 Hz	1 μ s to 16000 s in 5 % steps
	frequency sweep, span \geq 10 Hz	2.5 ms to 16000 s in steps \leq 10 %
Max. deviation of sweep time		3 %
Measurement in time domain		with marker and cursor lines (resolution 31.25 ns)

Resolution bandwidths

Sweep filters		
3 dB bandwidths	all models except R&S [®] FSU43, R&S [®] FSU50, model .49 and R&S [®] FSU67, model .66	10 Hz to 20 MHz in 1/2/3/5 sequence, 50 MHz
	R&S [®] FSU43, R&S [®] FSU50, model .49 and R&S [®] FSU67, model .66	10 Hz to 10 MHz in 1/2/3/5 sequence
Bandwidth uncertainty	10 Hz to 100 kHz (digital)	< 3 %
	200 kHz to 5 MHz (analog)	< 10 %
	10 MHz	-30 % to +10 %
	20 MHz	-20 % to +20 %
	50 MHz, f \leq 3.6 GHz	-20 % to +20 %
	50 MHz, f > 3.6 GHz	-30 % to +100 %
Shape factor 60 dB:3 dB	\leq 100 kHz	< 6
	200 kHz to 2 MHz	< 12
	3 MHz to 10 MHz	< 7
	20 MHz, 50 MHz	< 6, nominal

FFT filters		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		< 5 %, nominal
Shape factor 60 dB:3 dB		< 3, nominal

EMI filters		
6 dB bandwidths		10/100/200 Hz, 1/9/10/100/120 kHz, 1 MHz
Bandwidth uncertainty	\leq 120 kHz (digital)	< 3 %, nominal
	1 MHz (analog)	< 10 %, nominal
Shape factor 60 dB:3 dB	\leq 120 kHz	< 6, nominal
	1 MHz	< 12, nominal

Channel filters		
Bandwidths		100/200/300/500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz 1/1.2288/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5 MHz
Shape factor 60 dB:3 dB		< 2, nominal
Bandwidth uncertainty		< 2 %, nominal
Video bandwidths		
		1 Hz to 10 MHz in 1/2/3/5 sequence

Level

Display range		displayed noise floor to +30 dBm
---------------	--	----------------------------------

Maximum input level		
DC voltage	RF input AC coupled	50 V
	RF input DC coupled	0 V
CW RF power	RF attenuation 0 dB	20 dBm (= 0.1 W)
	RF attenuation ≥ 10 dB	30 dBm (= 1 W)
Pulse spectral density		97 dB μ V/MHz
Max. pulse voltage	RF attenuation ≥ 10 dB	150 V
Max. pulse energy	RF attenuation ≥ 10 dB, 10 μ s	1 mWs

Intermodulation		
1 dB compression of input mixer	0 dB RF attenuation	
	≤ 3.6 GHz	+13 dBm, nominal
	> 3.6 GHz	
	R&S [®] FVSU8	+10 dBm, nominal
	R&S [®] FVSU26/43/46/50/67	+7 dBm, nominal
Third-order intercept point (TOI)	level 2×-10 dBm, $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger	
	R&S [®] FVSU3	
	10 MHz $\leq f_{in} < 300$ MHz	> 17 dBm, typ. 20 dBm
	300 MHz $\leq f_{in} \leq 3.6$ GHz	> 19 dBm, typ. 25 dBm
	R&S [®] FVSU8	
	10 MHz $\leq f_{in} < 300$ MHz	> 17 dBm, typ. 20 dBm
	300 MHz $\leq f_{in} \leq 3.6$ GHz	> 20 dBm, typ. 25 dBm
	3.6 GHz $\leq f_{in} \leq 8$ GHz	> 18 dBm, typ. 23 dBm
	R&S [®] FVSU26/43/46/50/67	
	10 MHz $\leq f_{in} < 300$ MHz	> 17 dBm, typ. 20 dBm
	300 MHz $\leq f_{in} < 3.6$ GHz	> 22 dBm, typ. 27 dBm
	3.6 GHz $\leq f_{in} < 26.5$ GHz	> 12 dBm, typ. 15 dBm
	R&S [®] FVSU43/46	
	26.5 GHz $\leq f_{in} \leq 40$ GHz	> 12 dBm, typ. 15 dBm
	$f_{in} > 40$ GHz	> 12 dBm, nominal
	R&S [®] FVSU50	
	26.5 GHz $\leq f_{in} < 28$ GHz	> 8 dBm, typ. 11 dBm
	28 GHz $\leq f_{in} \leq 40$ GHz	> 12 dBm, typ. 15 dBm
	$f_{in} > 40$ GHz	> 12 dBm, nominal
	R&S [®] FVSU67	
	26.5 GHz $\leq f_{in} < 28$ GHz	> 8 dBm, typ. 11 dBm
	28 GHz $\leq f_{in} \leq 40$ GHz	> 12 dBm, typ. 15 dBm
	40 GHz $\leq f_{in} \leq 50$ GHz	> 12 dBm, nominal
	$f_{in} > 50$ GHz	> 9 dBm, nominal

Second harmonic intercept (SHI)	$f_{in} < 100 \text{ MHz}$	> 35 dBm
	$100 \text{ MHz} < f_{in} \leq 400 \text{ MHz}$	> 45 dBm, typ. 55 dBm
	$400 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$	> 52 dBm, typ. 60 dBm
	$500 \text{ MHz} < f_{in} \leq 1 \text{ GHz}$	> 45 dBm, typ. 55 dBm
	$1 \text{ GHz} < f_{in} \leq 1.8 \text{ GHz}$	> 35 dBm
	R&S®FSU8/26/43/46/50	
	$f_{in} > 1.8 \text{ GHz}$	> 80 dBm, nominal
	R&S®FSU67	
	$1.8 \text{ GHz} < f_{in} \leq 4.0 \text{ GHz}$	> 65 dBm, nominal
$f_{in} > 4.0 \text{ GHz}$	> 75 dBm, nominal	

Displayed average noise level	0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW $f < 10 \text{ kHz}$: 10 Hz FFT filter, trace average, sweep count = 20 $f \geq 10 \text{ kHz}$: RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker	
	20 Hz	< -90 dBm
	100 Hz	< -110 dBm
	1 kHz	< -120 dBm
	10 kHz	< -130 dBm
	100 kHz	< -130 dBm
	1 MHz	< -140 dBm
	10 MHz	< -153 dBm
	R&S®FSU3	
	$20 \text{ MHz} \leq f < 2.0 \text{ GHz}$	< -155 dBm, typ. -158 dBm
	$2.0 \text{ GHz} \leq f \leq 3.0 \text{ GHz}$	< -153 dBm, typ. -157 dBm
	$3.0 \text{ GHz} \leq f \leq 3.6 \text{ GHz}$	< -152 dBm, typ. -156 dBm
	R&S®FSU8	
	$20 \text{ MHz} \leq f < 2.0 \text{ GHz}$	< -155 dBm, typ. -158 dBm
	$2.0 \text{ GHz} \leq f < 3.0 \text{ GHz}$	< -153 dBm, typ. -155 dBm
	$3.0 \text{ GHz} \leq f < 7 \text{ GHz}$	< -152 dBm, typ. -154 dBm
	$7 \text{ GHz} \leq f \leq 8 \text{ GHz}$	< -150 dBm, typ. -152 dBm
	R&S®FSU26	
	$20 \text{ MHz} \leq f < 2 \text{ GHz}$	< -152 dBm, typ. -156 dBm
	$2 \text{ GHz} \leq f < 3.6 \text{ GHz}$	< -150 dBm, typ. -153 dBm
	$3.6 \text{ GHz} \leq f < 8 \text{ GHz}$	< -152 dBm, typ. -156 dBm
	$8 \text{ GHz} \leq f < 13 \text{ GHz}$	< -150 dBm, typ. -153 dBm
	$13 \text{ GHz} \leq f < 18 \text{ GHz}$	< -148 dBm, typ. -151 dBm
	$18 \text{ GHz} \leq f < 22 \text{ GHz}$	< -147 dBm, typ. -150 dBm
	$22 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	< -145 dBm, typ. -148 dBm
	R&S®FSU43	
	$20 \text{ MHz} \leq f < 2 \text{ GHz}$	< -152 dBm, typ. -156 dBm
	$2 \text{ GHz} \leq f < 13 \text{ GHz}$	< -150 dBm, typ. -153 dBm
	$13 \text{ GHz} \leq f < 18 \text{ GHz}$	< -148 dBm, typ. -151 dBm
	$18 \text{ GHz} \leq f < 22 \text{ GHz}$	< -147 dBm, typ. -150 dBm
	$22 \text{ GHz} \leq f < 26.5 \text{ GHz}$	< -145 dBm, typ. -148 dBm
	$26.5 \text{ GHz} \leq f < 40 \text{ GHz}$	< -138 dBm, typ. -141 dBm
	$40 \text{ GHz} \leq f \leq 43 \text{ GHz}$	< -133 dBm, typ. -138 dBm

R&S®FSU46		
	20 MHz ≤ f < 2 GHz	< -152 dBm, typ. -156 dBm
	2 GHz ≤ f < 13 GHz	< -150 dBm, typ. -153 dBm
	13 GHz ≤ f < 18 GHz	< -148 dBm, typ. -151 dBm
	18 GHz ≤ f < 22 GHz	< -147 dBm, typ. -150 dBm
	22 GHz ≤ f < 26.5 GHz	< -145 dBm, typ. -148 dBm
	26.5 GHz ≤ f < 40 GHz	< -138 dBm, typ. -141 dBm
	40 GHz ≤ f ≤ 46 GHz	< -133 dBm, typ. -138 dBm
R&S®FSU50		
	20 MHz ≤ f < 2 GHz	< -152 dBm, typ. -156 dBm
	2 GHz ≤ f < 13 GHz	< -150 dBm, typ. -153 dBm
	13 GHz ≤ f < 18 GHz	< -148 dBm, typ. -151 dBm
	18 GHz ≤ f < 22 GHz	< -147 dBm, typ. -150 dBm
	22 GHz ≤ f < 26.5 GHz	< -145 dBm, typ. -148 dBm
	26.5 GHz ≤ f < 32 GHz	< -138 dBm, typ. -141 dBm
	32 GHz ≤ f < 46 GHz	< -133 dBm, typ. -136 dBm
	46 GHz ≤ f ≤ 50 GHz	< -128 dBm, typ. -131 dBm
R&S®FSU67		
	20 MHz ≤ f < 2 GHz	< -148 dBm, typ. -152 dBm
	2 GHz ≤ f < 13 GHz	< -144 dBm, typ. -148 dBm
	13 GHz ≤ f < 18 GHz	< -142 dBm, typ. -145 dBm
	18 GHz ≤ f < 22 GHz	< -140 dBm, typ. -144 dBm
	22 GHz ≤ f < 26.5 GHz	< -138 dBm, typ. -142 dBm
	26.5 GHz ≤ f < 40 GHz	< -136 dBm, typ. -140 dBm
	40 GHz ≤ f < 46 GHz	< -132 dBm, typ. -136 dBm
	46 GHz ≤ f < 51 GHz	< -128 dBm, typ. -132 dBm
	51 GHz ≤ f < 57 GHz	< -130 dBm, typ. -136 dBm
	57 GHz ≤ f < 65 GHz	< -126 dBm, typ. -130 dBm
	65 GHz ≤ f ≤ 67 GHz	< -120 dBm, typ. -124 dBm
	improvement with noise correction ON	max. 13 dB, nominal

Immunity to interference		
Image frequency	f ≤ 3.6 GHz	> 90 dB suppression, typ. > 110 dB
	3.6 GHz < f ≤ 40 GHz	> 70 dB suppression, typ. > 100 dB
	40 GHz < f ≤ 50 GHz	> 70 dB suppression, nominal
	f > 50 GHz	> 47 dB suppression
	f = receive frequency	
Intermediate frequency	f ≤ 3.6 GHz	> 90 dB suppression, typ. > 110 dB
	3.6 GHz < f ≤ 4.2 GHz	typ. 70 dB suppression
	4.2 GHz < f ≤ 50 GHz	> 70 dB suppression, typ. > 90 dB
	f > 50 GHz	> 47 dB suppression, typ. > 50 dB
	f = receive frequency	
Spurious response	f > 1 MHz, without input signal, 0 dB RF attenuation	< -103 dBm
Other interfering signals	Δf > 100 kHz	
	mixer level < -10 dBm, f _{in} ≤ 2.3 GHz	< -80 dBc
	mixer level < -35 dBm, 2.3 GHz < f _{in} < 4 GHz	< -70 dBc
	mixer level < -10 dBm	
	4 GHz ≤ f < 8 GHz	< -70 dBc
	8 GHz ≤ f < 16 GHz	< -64 dBc
	16 GHz ≤ f < 26 GHz	< -58 dBc
	26.5 GHz ≤ f < 40 GHz	< -52 dBc
	40 GHz ≤ f < 50 GHz	< -52 dBc, nominal
	50 GHz ≤ f < 64 GHz	< -47 dBc, nominal
	64 GHz ≤ f ≤ 67 GHz	< -43 dBc, nominal
f = receive frequency		

Level display		
Screen		(625 × 500) pixel (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	one measurement diagram	3
	two measurement diagrams	6
Trace detector		Max Peak, Min Peak, Auto Peak (Normal), sample, RMS, average,
	EMI detectors	Quasi Peak, CISPR-RMS, CISPR-AV
Number of measurement points	default value	625
	range	155 to 30001 in steps of about a factor of 2
Trace functions		Clear/Write, Max Hold, Min Hold, Average
Trace update rate	local measurement, display update rate, 625 points, zero span	80 per second
	remote measurement, display OFF	
	zero span/sweep time 1 ms	70 per second
	span = 10 MHz, sweep time 2.5 ms	50 per second
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1 %
Units of level axis	logarithmic level display	dBm, dBμV, dBmV, dBμA, dBpW
	linear level display	μV, mV, μA, mA, pW, nW

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	< 0.2 dB ($\sigma = 0.07$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥ 10 dB, +20 °C to +30 °C	
	20 Hz $\leq f < 10$ MHz	< 0.5 dB ($\sigma = 0.17$ dB)
	10 MHz $\leq f < 3.6$ GHz	< 0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz $\leq f < 8$ GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	8 GHz $\leq f < 22$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.7$ dB)
	22 GHz $\leq f < 40$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	40 GHz $\leq f < 50$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
	50 GHz $\leq f \leq 67$ GHz, span < 1 GHz	< 4 dB ($\sigma = 1.3$ dB)
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, +5 °C to +45 °C	
	20 Hz $\leq f < 3.6$ GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz $\leq f < 26.5$ GHz	add 0.5 dB to above values
	26.5 GHz $\leq f < 50$ GHz	add 1.0 dB to above values
	$f \geq 50$ GHz	add 1.5 dB to above values
RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values	
Attenuator switching uncertainty	$f = 128$ MHz 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting	RF attenuation 10 dB, referenced to -10 dBm reference level setting	< 0.15 dB ($\sigma = 0.05$ dB)

Display nonlinearity	+20 °C to +30 °C, mixer level ≤ -10 dBm	
Logarithmic level display	RBW ≤ 100 kHz or channel filters, S/N > 20 dB	
	0 dB to -70 dB	< 0.1 dB ($\sigma = 0.03$ dB)
	-70 dB to -90 dB	< 0.3 dB ($\sigma = 0.1$ dB)
	200 kHz \leq RBW ≤ 10 MHz, S/N > 16 dB	
	0 dB to -50 dB	< 0.2 dB ($\sigma = 0.07$ dB)
	-50 dB to -70 dB	< 0.5 dB ($\sigma = 0.17$ dB)
	RBW > 10 MHz, S/N > 16 dB	
Linear level display	0 dB to -50 dB	< 0.5 dB ($\sigma = 0.17$ dB)
Bandwidth switching error	referenced to RBW = 10 kHz	
	1 Hz to 100 kHz	< 0.1 dB ($\sigma = 0.03$ dB)
	200 kHz to 3 MHz	< 0.2 dB ($\sigma = 0.07$ dB)
	5 MHz to 50 MHz	< 0.5 dB ($\sigma = 0.15$ dB)
	FFT filter 1 Hz to 3 kHz	< 0.2 dB ($\sigma = 0.07$ dB)

Total measurement uncertainty	signal level 0 dB to -70 dB below reference level, S/N > 20 dB, 10 dB \leq RF attenuation ≤ 40 dB, span/RBW < 100 , 95 % confidence level, +20 °C to +30 °C, mixer level ≤ -10 dBm	
	20 Hz $\leq f < 10$ MHz, RBW ≤ 100 kHz	0.4 dB
	20 Hz $\leq f < 10$ MHz, RBW > 100 kHz	0.5 dB
	10 MHz $\leq f < 3.6$ GHz, RBW ≤ 100 kHz	0.3 dB
	10 MHz $\leq f < 3.6$ GHz, RBW > 100 kHz	0.5 dB
	3.6 GHz $\leq f < 8$ GHz	1.2 dB
	8 GHz $\leq f < 22$ GHz	1.5 dB
	22 GHz $\leq f < 40$ GHz	1.8 dB
	40 GHz $\leq f < 50$ GHz	2.2 dB
	50 GHz $\leq f < 67$ GHz	2.8 dB

I/Q data

Interface		GPIB or LAN interface
Memory length		max. 512 ksample I and Q
Sample length		24 bit, each I and Q
Sample rate	settable in steps of 0.5 (32 MHz $\times 2^{-n}$, n = 0 to 11)	15.625 kHz to 32 MHz
Max. signal bandwidth	sample rate ≤ 2 MHz	0.8 \times sample rate
	4 MHz	2.8 MHz
	8 MHz	4.8 MHz
	16 MHz	7 MHz
	32 MHz	9 MHz
IF pre-filter bandwidth		300 kHz to 10 MHz, 1/2/3/5 steps

Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

Trigger functions

Trigger		
Trigger source		free run, video, external, IF level (mixer level 10 dBm to -50 dBm)
Trigger offset	span \geq 10 Hz	125 ns to 100 s, resolution min. 125 ns (or 1 % of offset)
	span = 0 Hz	\pm (125 ns to 100 s), resolution min. 125 ns, dependent on sweep time
Max. deviation of trigger offset		\pm (31.25 ns + (0.1 % \times trigger offset))
Gated sweep		
Gate source		external, IF level, video
Gate delay		1 μ s to 100 s
Gate length		125 ns to 100 s, resolution min. 125 ns or 1 % of gate length
Max. deviation of gate length		\pm (31.25 ns + (0.05 % \times gate length))

Inputs and outputs (front panel)

RF input		
Impedance		50 Ω
Connector	R&S [®] F3U3, R&S [®] F3U8	N female
	R&S [®] F2U6	test port adapter APC 3.5 mm/N female
	R&S [®] F4U43, R&S [®] F4U46	test port adapter 2.92 mm (K)/N female
	R&S [®] F5U50	test port adapter 2.4 mm/N female
	R&S [®] F6U67	1.85 mm/V female
VSWR	RF attenuation \geq 10 dB, DC coupled	
	f < 3.6 GHz	< 1.5
	R&S [®] F3U8	
	3.6 GHz \leq f < 8 GHz	< 2
	R&S [®] F2U26/43/46/50/67	
	3.6 GHz \leq f < 18 GHz	< 1.8
	18 GHz \leq f < 26.5 GHz	< 2.0
	26.5 GHz \leq f < 40 GHz	< 2.5
	40 GHz \leq f < 50 GHz	< 3, nominal
50 GHz \leq f \leq 67 GHz	< 3.5, nominal	
Setting range of attenuator	RF attenuation < 10 dB or AC coupled	typ. 1.5
		0 dB to 75 dB, in 5 dB steps

Probe power supply		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA, nominal
Power supply for antennas etc		
Supply voltages		5-pin connector
		\pm 10 V and ground, max. 100 mA, nominal
Power supply for noise source		
		BNC female
Output voltage		0 V and 28 V, switchable, nominal
USB interface		type A plug, version 2.0

AF output		
Connector		3.5 mm mini jack
Output impedance		10 Ω
Open-circuit voltage		up to 1.5 V, adjustable

Inputs and outputs (rear panel)

IF 20.4 MHz		BNC female
Impedance		50 Ω
Bandwidth	RBW \leq 30 kHz	1.67 \times resolution bandwidth, min. 2.6 kHz
	RBW = 50 kHz, 100 kHz	400 kHz
	200 kHz \leq RBW \leq 10 MHz	equal to resolution bandwidth
Level	RBW \leq 100 kHz, FFT filter, mixer level $>$ -70 dBm	-20 dBm at reference level
	RBW = 200 kHz to 10 MHz, mixer level $>$ -50 dBm	0 dBm at reference level
IF 404.4 MHz	not available with R&S [®] FSU43, R&S [®] FSU50, model .49 and R&S [®] FSU67, model .66, active only if RBW $>$ 10 MHz	BNC female
Impedance		50 Ω
Bandwidth	RBW $>$ 10 MHz	equal to resolution bandwidth
Level	mixer level \leq 0 dBm	typ. 10 dB below mixer level
Video output		BNC female
Impedance		50 Ω
Output voltage	RBW \geq 200 kHz, logarithmic scaling, full scale	0 V to 1 V (EMF)
Reference output		BNC female
Impedance		50 Ω
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		$>$ 0 dBm, nominal
Reference input		BNC female
Impedance		50 Ω
Input frequency range		1 MHz \leq f_{in} \leq 20 MHz, in 1 Hz steps
Required level		$>$ 0 dBm from 50 Ω
Sweep output		BNC female
Output voltage		0 V to 5 V, proportional to displayed frequency
External trigger/gate input		BNC female
Trigger voltage		0.5 V to 3.5 V
Input impedance		\geq 10 k Ω
IEC/IEEE bus control		interface to IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0 or HP8566 compatible
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0
LAN interface		10/100 BaseT, RJ45
USB interface	upper connector	type A plug, version 1.1
	lower connector	type A plug, version 2.0
Serial interface		RS-232-C (COM), 9-pin female connectors
Printer interface		parallel (Centronics compatible)
Mouse interface		PS/2 compatible
Connector for external monitor (VGA)		15-pin D-Sub

General specifications

Display		21 cm LC TFT color display (8.4")
Resolution		(800 × 600) pixel (SVGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

Mass memory		
Mass memory		hard disk, USB flash disk (not supplied)
Data storage		>500 instrument settings and traces
Mass memory	R&S®FSU-B20 option	hard disk replaced by a flash disk

Temperature		
Ranges	operating temperature range	+5° C to +40 °C
	permissible temperature range	+0° C to +50 °C
	storage temperature range	-40°C to +70 °C
	R&S®FSU-B20 option	
	operating temperature range	0 °C to +50 °C
	permissible temperature range	0 °C to +55 °C
Climatic loading		+40 °C at 95 % relative humidity, in line with EN 60068-2-30

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 100 Hz, acceleration 1 g (RMS)
Shock		40 g shock spectrum, in line with MIL-STD-810E Method 516.4 Procedure I and MIL-PRF-28800F
	R&S®FSU-B20 option: random vibration	10 Hz to 300 Hz, acceleration 1.9 g (RMS)
Recommended calibration interval	operation with external reference	2 years
	operation with internal reference	1 year
RFI suppression		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1, IEC/EN 61326-2-1, CISPR 11/EN 55011, IEC/EN 61000-3-2, IEC/EN 61000-3-3

Power supply		
AC supply		100 V to 240 V, 3.1 A to 1.3 A; 50 Hz to 400 Hz, class of protection I in line with VDE 411
Power consumption	R&S®FSU3, R&S®FSU8	typ. 130 VA
	R&S®FSU26/43/46/50/67	typ. 150 VA
Safety		in line with EN 61010-1, IEC 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1-4
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D	435 mm × 192 mm × 460 mm (17.13 in × 7.56 in × 18.11 in)
Weight, without options, nominal	R&S®FSU3	14.6 kg (32.2 lb)
	R&S®FSU8	15.4 kg (33.95 lb)
	R&S®FSU26	16.5 kg (36.4 lb)
	R&S®FSU43/46/50	16.8 kg (37.0 lb)
	R&S®FSU67	17.4 kg (38.3 lb)

R&S® FSU-B9 tracking generator, R&S® FSU-B12 attenuator for tracking generator (not available for R&S® FSU67)

Unless specified otherwise, specifications not valid for frequency range from $-3 \times \text{RBW}$ to $+3 \times \text{RBW}$, however at least not valid from -100 kHz to $+100 \text{ kHz}$. Maximum output level $+5 \text{ dBm}$ (peak modulation in the case of amplitude-modulated signals).

Frequency		
Frequency range		100 kHz to 3.6 GHz
Resolution		1 Hz
Frequency offset		
Setting range		$\pm 200 \text{ MHz}$
Resolution		1 Hz

Spectral purity		
SSB phase noise	f = 500 MHz, carrier offset 10 kHz	
	normal mode	typ. -120 dBc (1 Hz)
	with frequency offset	typ. -110 dBc (1 Hz)
	with FM modulation ON	typ. -110 dBc (1 Hz)

Level		
Level setting range		-30 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB
	with option R&S® FSU-B12	-100 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB

Max. deviation of output level		
Absolute	f = 128 MHz, output level -20 dBm to 0 dBm	$< 1 \text{ dB}$ ($\sigma = 0.34 \text{ dB}$)
Frequency response	referenced to level at 128 MHz, sweep time $> 100 \text{ ms}$, $+5 \text{ }^\circ\text{C}$ to $+45 \text{ }^\circ\text{C}$	
	output level -20 dBm to 0 dBm , 100 kHz to 3.6 GHz	$< 3 \text{ dB}$, typ. 1.9 dB
	output level -30 dBm to -20 dBm , f = 100 kHz to 3.6 GHz	3 dB
	additional deviation with R&S® FSU-B12, 100 kHz to 3.6 GHz	$< 1 \text{ dB}$

Dynamic range		
Attenuation measurement range	RBW = 1 kHz, f $> 10 \text{ MHz}$	100 dB
Harmonics	output level -10 dBm	typ. -30 dBc
Spurious, nonharmonics	output level 0 dBm	typ. -30 dBc

Level sweep		
Level range		0 dBm to -25 dBm
Max. deviation of output level	f = 100 kHz to 2 GHz	
	output level 0 dBm to -5 dBm	$< 1.5 \text{ dB}$
	output level -5 dBm to -15 dBm	$< 2 \text{ dB}$
	output level -15 dBm to -25 dBm	$< 3 \text{ dB}$
	f = 2 GHz to 3 GHz	$< 3 \text{ dB}$
	output level 0 dBm to -25 dBm	

Modulation		
Modulation format	external	I/Q, AM, FM
Input voltage	full scale	
	AM, FM, V_{pp}	1 V
	I/Q	$\sqrt{U_i^2 + U_q^2} = 0.5 \text{ V}$
AM	$f_{\text{Center}} > f_{\text{Mod}}$, span = 0 Hz	
Modulation depth		0 % to 99 %
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
FM	$f_{\text{Center}} > f_{\text{Mod}}$, span = 0 Hz	
Frequency deviation	full range	100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Modulation frequency range	deviation $\leq 10 \text{ MHz}$	0 Hz to 1 kHz
	deviation $\leq 1 \text{ MHz}$	0 Hz to 100 kHz
Modulation frequency response	0 Hz to 100 kHz	1 dB
I/Q modulation	$f_{\text{Center}} > f_{\text{Mod}}$, span = 0 Hz	
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
Modulation deviation of tracking generator	I/Q modulation, typical values, baseband signals generated by the R&S® AMIQ	
EVM	NADC/TETRA/PDC	
	RMS	2 %
	peak	4 %
	PHS	
	RMS	2 %
Phase error	GSM/DCS1800/PCS1900	
	RMS	1.5°
	peak	5°
Rho factor	IS-95 CDMA	0.997

Inputs and outputs (front panel)		
RF output		N female, 50 Ω
VSWR	$100 \text{ kHz} \leq f \leq 2 \text{ GHz}$	1.2
	$2 \text{ GHz} \leq f \leq 3.6 \text{ GHz}$	1.5

Inputs and outputs (rear panel)		
TG I/AM IN		BNC female
Impedance		50 Ω
Input voltage	V_{pp}	1 V
TG Q/FM IN		BNC female
Impedance		50 Ω
Input voltage	V_{pp}	1 V

R&S® FSU-B21 LO/IF ports for external mixers (for R&S® FSU26/43/46/50/67 only)

LO signal		
Frequency range		7.0 GHz to 15.5 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency		404.4 MHz
Full scale level	2-port mixer (LO output/IF input, front panel)	-20 dBm
	3-port mixer (IF input, front panel)	-20 dBm
Level uncertainty	IF input level -30 dBm, RBW 30 kHz, two-port mixer, LO output/IF input (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	three-port mixer, IF input (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

Inputs and outputs (front panel)		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

R&S® FSU-B23 RF preamplifier (for R&S® FSU26 only, requires R&S® FSU-B25 option)

Level measurement uncertainty		
Frequency response	preamplifier ON	
	3.6 GHz to 8 GHz	< 2.0 dB ($\sigma = 0.7$ dB)
	8 GHz to 22 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	22 GHz to 26.5 GHz	< 3.0 dB ($\sigma = 1$ dB)
Displayed average noise level	0 dB RF attenuation, termination 50 Ω , RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, log. scaling, trace average, sweep count = 20, mean marker, normalized to 1 Hz RBW	
	preamplifier OFF	
	3.6 GHz to 8 GHz	R&S® FSU26 specifications + 2 dB
	8 GHz to 26.5 GHz	R&S® FSU26 specifications + 3 dB
	preamplifier ON	
	3.6 GHz to 8 GHz	< -162 dBm, typ. -165 dBm
	8 GHz to 13 GHz	< -159 dBm, typ. -162 dBm
	13 GHz to 18 GHz	< -157 dBm, typ. -160 dBm
	18 GHz to 22 GHz	< -154 dBm, typ. -159 dBm
	22 GHz to 26.5 GHz	< -150 dBm, typ. -155 dBm
improvement with noise correction ON		max. 13 dB, nominal

R&S® FSU-B24 preamplifier (for R&S® FSU26/43/46/50 only)

Frequency range	R&S® FSU26	100 kHz to 26.6 GHz
	R&S® FSU43	100 kHz to 43 GHz
	R&S® FSU46	100 kHz to 46 GHz
	R&S® FSU50 ¹	100 kHz to 50 GHz
Nominal gain		30 dB

Displayed average noise level (DANL)	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, preamplifier OFF f < 10 kHz: RBW = 10 Hz FFT filter, trace average, sweep count = 20, f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
	20 Hz	< -90 dBm
	100 Hz	< -110 dBm
	1 kHz	< -120 dBm
	10 kHz	< -130 dBm
	100 kHz	< -130 dBm
	1 MHz	< -140 dBm
	10 MHz	< -151 dBm
	20 MHz ≤ f < 2 GHz	< -151 dBm, typ. -154 dBm
	2 GHz ≤ f < 8 GHz	< -149 dBm, typ. -152 dBm
	8 GHz ≤ f < 13 GHz	< -147 dBm, typ. -150 dBm
	13 GHz ≤ f < 18 GHz	< -145 dBm, typ. -148 dBm
	18 GHz ≤ f < 22 GHz	< -144 dBm, typ. -147 dBm
	22 GHz ≤ f < 26.5 GHz	< -140 dBm, typ. -143 dBm
	26.5 GHz ≤ f < 32 GHz	< -135 dBm, typ. -138 dBm
	32 GHz ≤ f < 42 GHz	< -130 dBm, typ. -133 dBm
	42 GHz ≤ f ≤ 50 GHz	< -125 dBm, typ. -128 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, preamplifier ON RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
	100 kHz	< -140 dBm
	1 MHz	< -150 dBm
	10 MHz	< -163 dBm
	20 MHz ≤ f < 2 GHz	< -164 dBm, typ. -167 dBm
	2 GHz ≤ f < 3.6 GHz	< -163 dBm, typ. -166 dBm
	3.6 GHz ≤ f < 20 GHz	< -165 dBm, typ. -168 dBm
	20 GHz ≤ f < 33 GHz	< -163 dBm, typ. -166 dBm
	33 GHz ≤ f < 42 GHz	< -158 dBm, typ. -161 dBm
	42 GHz ≤ f ≤ 50 GHz	< -152 dBm, typ. -155 dBm
improvement with noise correction ON	max. 13 dB, nominal	

¹ Not available for R&S® FSU50, model .49.

Level measurement uncertainty	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	
Absolute level uncertainty at 128 MHz	preamplifier OFF	< 0.2 dB ($\sigma = 0.07$ dB)
	preamplifier ON	< 0.3 dB ($\sigma = 0.1$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥ 10 dB, preamplifier OFF, +20 °C to +30 °C	
	20 Hz $\leq f < 10$ MHz	< 0.5 dB ($\sigma = 0.16$ dB)
	10 MHz $\leq f < 3.6$ GHz	< 0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz $\leq f < 8$ GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	8 GHz $\leq f < 22$ GHz, span < 1 GHz	< 2.0 dB ($\sigma = 0.7$ dB)
	22 GHz $\leq f < 40$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	40 GHz $\leq f \leq 50$ GHz, span < 1 GHz	< 3.0 dB ($\sigma = 1$ dB)
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, preamplifier OFF, +5 °C to +45 °C	
	20 Hz $\leq f < 3.6$ GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz $\leq f < 26.5$ GHz	add 0.5 dB to above values
	26.5 GHz $\leq f \leq 50$ GHz	add 1.0 dB to above values
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, preamplifier ON, +20 °C to +30 °C	
	100 kHz $\leq f < 10$ MHz	< 0.8 dB ($\sigma = 0.27$ dB)
	10 MHz $\leq f < 3.6$ GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz $\leq f < 8$ GHz	< 2.0 dB ($\sigma = 0.7$ dB)
	8 GHz $\leq f < 22$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	22 GHz $\leq f < 40$ GHz, span < 1 GHz	< 3.0 dB ($\sigma = 1$ dB)
	40 GHz $\leq f \leq 50$ GHz, span < 1 GHz	< 3.5 dB ($\sigma = 1.2$ dB)
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, preamplifier ON, +5 °C to +45 °C	
	100 kHz $\leq f < 10$ MHz	< 1.0 dB ($\sigma = 0.3$ dB)
	10 MHz $\leq f < 3.6$ GHz	< 0.8 dB ($\sigma = 0.27$ dB)
3.6 GHz $\leq f < 26.5$ GHz	add 0.5 dB to above values	
26.5 GHz $\leq f \leq 50$ GHz	add 1.0 dB to above values	
RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values	

Intermodulation		
Second harmonic intercept (SHI)	$f_{in} > 1.8$ GHz	> 65 dBm, nominal

R&S® FSU-B25 electronic attenuator and low-noise preamplifier, R&S® FSU-B85 extended specifications for low-noise preamplifier

Frequency		
Frequency range	R&S® FSU3/26/43/46/50 ²	
	electronic attenuator	10 MHz to 3.6 GHz
	preamplifier	100 kHz to 3.6 GHz
	R&S® FSU8	
	electronic attenuator	10 MHz to 8 GHz
	preamplifier	100 kHz to 8 GHz

Setting range		
Electronic attenuator		0 dB to 30 dB, in 5 dB steps
Preamplifier		20 dB, switchable

Level measurement uncertainty		
Frequency response	with preamplifier or electronic attenuator	
	10 MHz to 50 MHz	< 1 dB ($\sigma = 0.34$ dB)
	50 MHz to 3.6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz to 8 GHz	< 2.0 dB ($\sigma = 0.7$ dB)
Reference error	at 128 MHz, RBW \leq 100 kHz, reference level -30 dBm, RF attenuation 10 dB	
	electronic attenuator	< 0.3 dB ($\sigma = 0.1$ dB)
	preamplifier	< 0.3 dB ($\sigma = 0.1$ dB)

Displayed average noise level	0 dB RF attenuation, termination 50 Ω , RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, log. scaling, trace average, sweep count = 20, mean marker, normalized to 1 Hz RBW	
	preamplifier ON	
	R&S® FSU3/8/26	
	10 MHz to 2.0 GHz	< -162 dBm
	2.0 GHz to 3.6 GHz	< -160 dBm
	R&S® FSU8	
	3.6 GHz to 8 GHz	< -157 dBm
	R&S® FSU43/46/50	
	10 MHz to 40 MHz	< -160 dBm
	40 MHz to 2 GHz	< -162 dBm
	2 GHz to 3.6 GHz	< -160 dBm
	with the R&S® FSU-B25 built in, the average noise level values displayed by the base units degrade by (R&S® FSU-B25 OFF)	
	20 Hz to 3.6 GHz	1 dB
	R&S® FSU8	
	3.6 GHz to 8 GHz	2 dB
	preamplifier OFF, electronic attenuator 0 dB	
	20 Hz to 3.6 GHz	typ. 2.5 dB
	R&S® FSU8	
	3.6 GHz to 8 GHz	typ. 3.5 dB
improvement with noise correction ON		
	max. 13 dB, nominal	

² Not available for R&S® FSU50, model .49.

Displayed average noise level with R&S®FSU-B85, extended specification for low-noise preamplifier	0 dB RF attenuation, termination 50 Ω, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, log. scaling, trace average, sweep count = 20, mean marker, normalized to 1 Hz RBW	
	preamplifier ON	
	R&S®FSU3, R&S®FSU8	
	10 MHz to 100 MHz	< -164 dBm, typ. -166 dBm
	100 MHz to 200 MHz	< -168 dBm, typ. -170 dBm
	200 MHz to 2 GHz	< -166 dBm, typ. -168 dBm
	2 GHz to 3.6 GHz	< -165 dBm, typ. -167 dBm
	R&S®FSU8	
	3.6 GHz to 6 GHz	< -165 dBm, typ. -167 dBm
	6 GHz to 8 GHz	< -163 dBm, typ. -165 dBm
improvement with noise correction ON		max. 11 dB, nominal
Intermodulation		
Third-order intercept point (TOI)	electronic attenuator ON, $\Delta f > 5 \times \text{RBW}$ or 10 kHz	
	10 MHz to 300 MHz	> 17 dBm
	300 MHz to 3.6 GHz	> 20 dBm
	3.6 GHz to 8 GHz	> 18 dBm

R&S®FSU-B27 broadband FM demodulator output

Frequency deviation		
Frequency deviation		≤ 5 MHz
Deviation + modulation frequency		≤ 5 MHz
FM slope	load impedance 50 Ω	280 mV/MHz ± 20 %
Frequency response		
	DC to 1 MHz (< 1 MHz deviation)	< 0.4 dB
	4 MHz (< 1 MHz deviation)	typ. 3 dB
Distortion	1 MHz deviation + 1 MHz modulation frequency	> 30 dBc
Residual FM		
Lowpass filters	LF-lowpass 100 kHz 3 dB bandwidth	< 100 Hz RMS 30 kHz, 100 kHz, 300 kHz, 1 MHz

Ordering information

Designation	Type	Order No.
Spectrum Analyzer, 20 Hz to 3.6 GHz	R&S®FSU3	1313.9000.03
Spectrum Analyzer, 20 Hz to 8 GHz	R&S®FSU8	1313.9000.08
Spectrum Analyzer, 20 Hz to 26.5 GHz	R&S®FSU26	1313.9000.26
Spectrum Analyzer, 20 Hz to 43 GHz	R&S®FSU43	1313.9000.43
Spectrum Analyzer, 20 Hz to 46 GHz	R&S®FSU46	1313.9000.46
Spectrum Analyzer, 20 Hz to 50 GHz	R&S®FSU50 ³	1313.9000.49
Spectrum Analyzer, 20 Hz to 50 GHz	R&S®FSU50	1313.9000.50
Spectrum Analyzer, 20 Hz to 67 GHz	R&S®FSU67 ³	1313.9000.66
Spectrum Analyzer, 20 Hz to 67 GHz	R&S®FSU67	1313.9000.67
Accessories supplied		
Power cable, printed quick start guide and CD-ROM (with operating manual and service manual).		
R&S®FSU26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector.		
R&S®FSU43, R&S®FSU46: test port adapter with 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connector.		
R&S®FSU50: test port adapter with 2.4 mm female (1088.1627.02) and N female (1036.4777.00) connector.		

³ Max. bandwidth 10 MHz.

Options

Designation	Type	Order No.	Retrofittable	Remarks
Options				
OCXO, low aging/improved phase noise at 10 Hz carrier offset	R&S®FSU-B4	1144.9000.02	yes	
Tracking Generator, 100 kHz to 3.6 GHz	R&S®FSU-B9	1142.8994.02	yes	not available for R&S®FSU67
External Generator Control	R&S®FSP-B10	1129.7246.03	yes	
Output Attenuator, 0 dB to 70 dB, for R&S®FSU-B9	R&S®FSU-B12	1142.9349.02	yes	requires R&S®FSU-B9, not available for R&S®FSU67
Removable Hard Disk	R&S®FSU-B18	1303.0400.12	no	excludes R&S®FSU-B20
Second Hard Disk for R&S®FSU-B18	R&S®FSU-B19	1303.0600.02		requires R&S®FSU-B18
Extended Environmental Specifications	R&S®FSU-B20	1155.1606.11	no	
LO/IF Ports for External Mixers	R&S®FSU-B21	1157.1090.03	yes	only for R&S®FSU26/43/46/50/67
20 dB Preamplifier, 3.6 GHz to 26.5 GHz	R&S®FSU-B23	1157.0907.02	no	only for R&S®FSU26, requires R&S®FSU-B25
30 dB Preamplifier, 100 kHz to 50 GHz	R&S®FSU-B24	1157.2100.50	yes	only for R&S®FSU26/43/46/50, not available for R&S®FSU50, model .49., excludes R&S®FSU-B23, R&S®FSU-B25
Electronic Attenuator, 0 dB to 30 dB, and 20 dB Preamplifier (3.6 GHz)	R&S®FSU-B25	1144.9298.02	yes	not available for R&S®FSU50, model .49, and R&S®FSU67
Broadband FM Demodulator Output, max. dev. 5 MHz	R&S®FSU-B27	1157.2000.02	yes	
Vector Signal Analyzer	R&S®FSU-B73	1169.5696.03	no	not available for R&S®FSU67
Extended Specifications for Low-Noise Preamplifier of R&S®FSU-B25 option	R&S®FSU-B85	1303.3000.02	no	only for R&S®FSU3 and R&S®FSU8, requires R&S®FSU-B25
Firmware/Software				
GSM/EDGE Application Firmware	R&S®FS-K5	1141.1496.02		
FM Measurement Demodulator	R&S®FS-K7	1141.1796.02		
Bluetooth® 4 Application Firmware	R&S®FS-K8	1157.2568.02		
Power Sensor Measurements	R&S®FS-K9	1157.3006.02		
Application Firmware for Noise Figure and Gain Measurements	R&S®FS-K30	1300.6508.02		preamplifier (e.g. R&S®FSU-B25) recommended
Application Firmware for Phase Noise Measurement	R&S®FS-K40	1161.8138.02		
3GPP BTS/Node B FDD Application Firmware	R&S®FS-K72	1154.7000.02		
3GPP UE FDD Application Firmware (incl HSUPA)	R&S®FS-K73	1154.7252.02		
3GPP HSDPA BTS Application Firmware	R&S®FS-K74	1300.7156.02		requires R&S®FS-K72
3GPP TD-SCDMA BTS Application Firmware	R&S®FS-K76	1300.7291.02		
3GPP TD-SCDMA UE Application Firmware	R&S®FS-K77	1300.8100.02		
CDMA2000® 5/IS-95 (cdmaOne)/1xEV-DV BTS Application Firmware	R&S®FS-K82	1157.2316.02		
CDMA2000® 1xEV-DV MS Application Firmware	R&S®FS-K83	1157.2416.02		
CDMA2000® 1xEV-DO BTS Application Firmware (incl Rev A)	R&S®FS-K84	1157.2851.02		
CDMA2000® 1xEV-DO MS Application Firmware	R&S®FS-K85	1300.6689.02		

⁴ The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

⁵ CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with 19" Adapter R&S®ZZA-411)	R&S®ZZA-T45	1109.3774.00
Matching pads, 50 Ω/75 Ω		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
SWR bridges, 50 Ω		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
High power attenuators		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
N-type adapter for R&S®RT-Zx probes	R&S®RT-ZA9	1417.0909.02
Probe power connector, 3 pin		1065.9480.00
DC blocks		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
External harmonic mixers (for R&S®FSU26/43/46/50 with R&S®FSU-B21 option)		
Harmonic Mixer 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer 50 GHz to 75 GHz	R&S®FS-Z75	1089.0847.02
Harmonic Mixer 60 GHz to 90 GHz	R&S®FS-Z90	1089.0899.02
Harmonic Mixer 75 GHz to 110 GHz	R&S®FS-Z110	1089.0947.04
For R&S®FSU26 only		
Test port adapter N male		1021.0541.00
Test port adapter 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set N male and 3.5 mm male	R&S®FSE-Z15	1046.2002.02
For R&S®FSU43 and R&S®FSU46 only		
Test port adapter N male		1036.4783.00
Test port adapter K male		1036.4802.00
Test port adapter 2.4 mm female	R&S®FSE-Z5	1088.1627.02
For R&S®FSU50 only		
Test port adapter N male		1036.4783.00
Test port adapter K female		1036.4790.00
Test port adapter K male		1036.4802.00

Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia/Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 8228/+86 400 650 5896
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (as)
PD 0758.0016.22 | Version 16.01 | May 2012 | R&S®FSU

Subject to change

© 2004 -2012 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



0758001622