



## EMI Test Receivers ESHS

9 kHz to 30 MHz

- Comply with CISPR 16-1, VDE 0876 and ANSI C63.2
- For measurements to European Standards 55011 to 55022, ETS, FCC, VCCI and VDE 0871 to 0879
- Level measurement range -36 to +137 dB $\mu$ V
- Frequency resolution 10 Hz
- Wide dynamic range
- High measuring accuracy
- Five preselection filters
- Battery or AC supply
- Parallel detectors for average, peak and quasi-peak indication
- Macros for automatic test runs



**ROHDE & SCHWARZ**

## Functions

The EMI Test Receivers ESHS 10 and 30 are double-conversion heterodyne receivers covering the frequency range from 9 kHz to 30 MHz. They can be manually operated, featuring high frequency resolution and accurate level indication, both average and quasi-peak.

Thanks to the built-in intelligence of the test receivers, the time required for measurements is reduced considerably. Being specialists for EMI measurements to CISPR, CENELEC, ETSI, FCC, VCCI and VDE standards, these test receivers furnish results at a speed and accuracy not possible previously.

Their real strength, however, is the automatic measurement of RFI voltages. For this measurement, the test receivers control the artificial mains network, detect the line with the highest RFI level, compare the results with the permissible limits and furnish a comprehensive test report with all the necessary information.

Both receiver models combine three classes of instruments in one:


- a compact, manually tunable and battery-operated test receiver
- an automatic test receiver which automatically performs measurements and reports the results
- a system-compatible test receiver

## Features

- Frequency range 9 kHz to 30 MHz
- RF attenuator switchable in 10-dB steps in range 0 to 120 dB; high pulse loading capacity of input attenuator (100 mW)
- Pre-amplifier with wide dynamic range, can be switched between preselection filter and 1st mixer
- Crystal-controlled synthesizer as 1st LO, variable in 10-Hz steps, sweep mode for fast frequency scans

permanently activated peak detectors

- Logarithmic amplifier with more than 70 dB dynamic range
- 12-bit A/D converter with short conversion time
- IF filters with low delay distortion
- Flash EPROMs allowing convenient and fast firmware updating
- Digital level indication on LC display and analog level indication on moving-coil meter taking into account transducer factors and their units

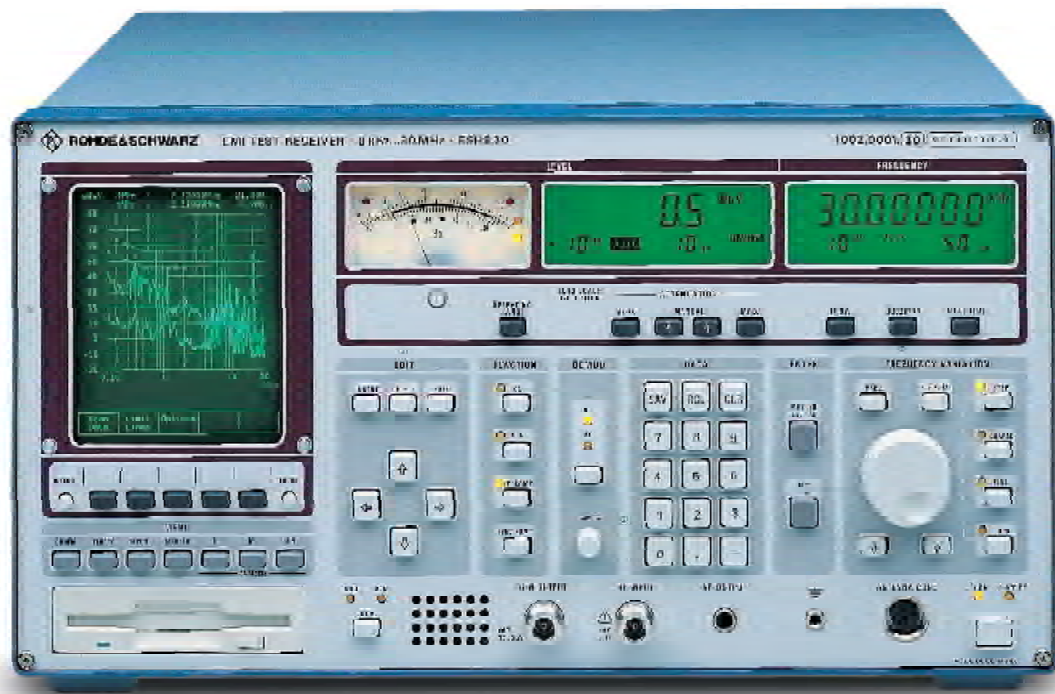

- High-level input mixer ensuring high isolation of 1st LO
- Field-strength measurements using test antennas
- Highly linear envelope detector with more than 70 dB dynamic range
- Peak, average and quasi-peak detectors operating in parallel
- Peak indication with automatic consideration of IF bandwidth correction factors for measuring broadband interference (PK/MHz)
- Automatic overload detection in mixer stages and in test channel by
- High measuring accuracy: error  $\leq 1$  dB; typ.  $\leq 0.5$  dB
- Detection of faulty modules by built-in selftest facilities





The results of a frequency scan are usually first displayed in graphical form on the screen and then output on a printer as a list and/or on a plotter as a graph. Time can be saved by simultaneous printing of the lists and plotting of the graphs. Plotting is also possible during the frequency scan so that the desired document is already obtained during the measurement. Any relevant information can be added to the test report, either by entering it via a line editor or, more conveniently, via an MF2 keyboard that can be connected. Infor-

mation is automatically added to the parameters known to the ESHS such as date, time and receiver settings.

Macros for automatic test runs (ANALYSIS OPTIONS) match the ESHS 10 and 30 to the specific configuration, device under test and measurement specification. Being thus prepared, the test receivers perform the following sequences automatically:

- Fast prescan measurement using the peak and/or average detector
- Final measurement at critical frequencies – for RFI voltage measurements on all phases of the artificial mains network (LISN) – using the average and/or quasi peak detector
- Report of results on printer or plotter
- ESHS30: storage of results on floppy disk
- Determination of critical frequencies by means of limit lines with data reduction to shorten the measuring time

The minimum configuration consisting of ESHS 10 or 30, artificial mains network (LISN) and plotter is already a powerful and cost-effective test set.




## Remote control

The IEC/IEEE-bus interface complies with the latest standard IEEE 488 Part 2. The measured values are output with a resolution of 0.01 dB.

## Interfaces

For further signal evaluation and for driving or feeding add-on units, ESHS 10 and 30 have the following interfaces:

- IEC/IEEE-bus interface
- Coding and supply socket (ANTENNA CODE) for active antennas and other accessories
- IF output 80 kHz (80 kHz OUTPUT) for evaluating the IF signal eg with an oscilloscope
- Envelope detector output (VIDEO OUTPUT) for evaluating the detected IF signal eg with an oscilloscope
- Connector for an MF2-compatible keyboard for text entry
- Input for an external reference frequency (5 or 10 MHz, automatic detection)

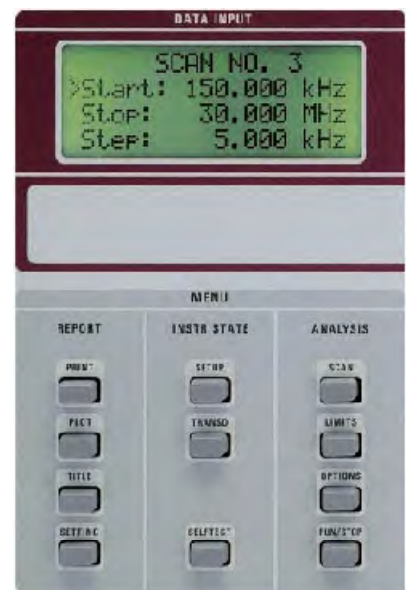

- USER INTERFACE with
  - 6 TTL ports for driving external devices, eg for phase selection of the Artificial Mains Networks ESH2-Z5 and ESH3-Z5
  - input for external triggering of measurements
  - outputs for the analog display voltage with and without simulation of the meter response for connecting a discontinuous interference analyzer
- RS-232 interface for reprogramming the built-in flash EPROMs when updating the firmware via an AT-compatible computer
- Parallel interface (PRINTER INTERFACE) for connecting a printer
- IF output 74.7 MHz for connecting a panoramic display (ESHS 10 only)
- Connector (11 to 33 V) for battery-powered operation, eg in a vehicle

## Design

The service-friendly modular design of the ESHS 10 and 30 in conjunction with a consequent design to EMC rules including the low-emission screen ensures excellent results regarding RFI emission and immunity.

A faulty module can easily be found by the built-in selftest and replaced with a minimum of effort and without affecting the other modules.



## Specifications

<b>Frequency range</b> Frequency setting	9 kHz to 30 MHz 1. with tuning knob in 10-Hz, 10-kHz steps or any step size (switch-selected) 2. numerical keyboard entry 3. in steps of any selectable size 4. automatic scanning (RF analysis)
Display Resolution Setting error	7-digit LCD 10 Hz <3 × 10 <sup>-6</sup> +30 Hz
<b>RF input</b> VSWR	Z <sub>in</sub> = 50 Ω, N connector, female <1.2 with ≥10 dB RF attenuation, <2 with 0 dB RF attenuation
Oscillator reradiation at RF input (0 dB RF attenuation) without preamplifier with preamplifier Preamplifier	<20 dBμV <10 dBμV switchable between input filter and 1st mixer 10 dB five bandpass filters 9 kHz to <150 kHz 150 kHz to <4.05 MHz 4.05 MHz to <12.8 MHz 12.8 MHz to <21.55 MHz 21.55 MHz to 30 MHz
Gain Preselector	10 dB
<b>Maximum input level</b> (with and without preamplifier) RF attenuation 0 dB	
DC voltage	7 V
Sinewave AC voltage	130 dBμV
Pulse spectral density	96 dBμV/MHz
RF attenuation ≥10 dB (DC-coupled)	
DC voltage	7 V (±1 W)
Sinewave AC voltage	137 dBμV
Max. pulse voltage (10 μs)	700 V
Max. pulse energy (10 μs)	100 mWs

### Interference rejection, non-linearities

Image-frequency rejection	>90, typ. 100 dB
1st IF	>75 dB
2nd IF	>90, typ. 100 dB
IF rejection	>90, typ. 100 dB
Intercept point d3, with  f <sub>1</sub> -f <sub>2</sub>   ≥ 100 kHz and 0 dB RF attenuation	
	Preamplifier
	off      on
Level (f <sub>1</sub> , f <sub>2</sub> ) at receiver input	-10 dBm      -20 dBm
f <sub>in</sub> < 2 MHz	typ. 15 dBm      typ. 0 dBm
f <sub>in</sub> ≥ 2 MHz	>15 dBm      >0 dBm
	typ. +20 dBm      typ. +5 dBm
Intercept point k2	>40 dBm      >20 dBm

### RF shielding

Voltage indication at a field strength of 10 V/m with 0 dB RF attenuation (f ≠ f <sub>in</sub> )	<-10 dBμV
Additional error in quasi-peak indication range	<1 dB
Intermediate frequencies	
1st IF	74.7 MHz
2nd IF	80 kHz

### IF bandwidths

Nominal bandwidth	-3 dB (±20%)	-6 dB	Shape factor
200 Hz <sup>1)</sup>	150 Hz	200 Hz	BW <sub>6dB</sub> /BW <sub>50dB</sub> = 1:8 (typ.)
		+20/-30 Hz	
10 kHz <sup>2)</sup>	7 kHz	9.5 kHz	BW <sub>6dB</sub> /BW <sub>60dB</sub> = 1:3.5 (typ.)
		±0.5 kHz	

1) Meets tolerances to CISPR 16.

2) Meets tolerances to CISPR 16 (min. 8 kHz, max. 10 kHz) and complies with MIL tolerance (10 kHz ±10%).

**Noise indication**

Average value, BW=200 Hz	Preamplifier	
	off	on
$f_{in}$ = 9 to 50 kHz	<-24 to <-30 dB $\mu$ V	<-30 to <-36 dB $\mu$ V
$f_{in}$ > 50 kHz	<-30 dB $\mu$ V typ. -35 dB $\mu$ V	<-36 dB $\mu$ V typ. -41 dB $\mu$ V
Average value, BW=10 kHz		
$f_{in}$ > 50 kHz	<-14 dB $\mu$ V typ. -17 dB $\mu$ V	<-20 dB $\mu$ V typ. -25 dB $\mu$ V
Peak value, (typ. increase as against average value)	+11 dB	
Quasi-peak		
Band A (9 to 50 kHz)	typ. -24 to -30 dB $\mu$ V	typ. -30 to -36 dB $\mu$ V
(50 to 150 kHz)	typ. -32 dB $\mu$ V	typ. -38 dB $\mu$ V
Band B ( $\geq$ 150 kHz)	typ. -13 dB $\mu$ V	typ. -19 dB $\mu$ V
PK/MHz (BW=10 kHz)	typ. 34 dB $\mu$ V/MHz	typ. 28 dB $\mu$ V/MHz

**Voltage measurement range ( $f_{in}$  > 50 kHz)**

Lower limit (additional error caused by inherent noise < 1 dB)	Preamplifier	
	off	on
Average indication (AV)		
BW=200 Hz	<-26 dB $\mu$ V, typ. -31 dB $\mu$ V	<-32 dB $\mu$ V, typ. -37 dB $\mu$ V
BW=10 kHz	<-10 dB $\mu$ V, typ. -13 dB $\mu$ V	<-16 dB $\mu$ V, typ. -20 dB $\mu$ V
Peak indication (PK)		
BW=200 Hz	typ. -8 dB $\mu$ V	typ. -14 dB $\mu$ V
BW=10 kHz	typ. +10 dB $\mu$ V	typ. +4 dB $\mu$ V
Quasi-peak indication (QP)		
CISPR band A (pulse freq. 25 Hz)	typ. -30 dB $\mu$ V	typ. -36 dB $\mu$ V
CISPR band B (pulse freq. 100 Hz)	typ. -11 dB $\mu$ V	typ. -17 dB $\mu$ V
Upper limit		
AV, PK, QP	137 dB $\mu$ V (RF attenuation $\geq$ 10 dB)	
Inherent spurious response	<-10 dB $\mu$ V (equiv. input voltage)	

**Level display**

digital in dB $\mu$ V, dB $\mu$ A, dBm, dB $\mu$ V/m, dB $\mu$ A/m, dBpW analog	3 1/2 digits, resolution 0.1 dB on moving-coil meter in operating range of IF detector with additional digital display of lower range limit
Operating ranges	30, 60 dB
Screen (RF analysis) (ESHS30 only)	5" CRT with digital display memory
Resolution	1024 x 1024 pixels
Display range	
X axis (frequency)	freely selectable between 9 kHz and 30 MHz
Y axis (level)	10 to 200 dB, adjustable
Display modes	average (AV), peak (PK), spectral density measurement (PK/MHz), quasi-peak (QP)
Averaging, hold and measuring times	1 ms to 100 s (1/2/5 steps)

**Measuring error**

AV for S/N > 16 dB	< 1 dB (digital display), typ. < 2 dB (analog display)
Level calibration	harmonics generator

**Demodulation modes**

A0 (zero beat)
A3 (for A3E emissions)

**IF analysis (ESHS30 only)**

Display range	10 kHz to 2 MHz in 1, 2, 5 steps
Resolution	-3 dB Shape factor ( $\pm$ 20%) BW <sub>3dB</sub> : BW <sub>60dB</sub>
Nominal bandwidth	10 kHz 1:4 3 kHz 1:6 1 kHz 1:9
Sweep time	50 ms to 10 s (adjustable in 1/2/5 steps)
Level display range	80 dB
Input attenuation	0/20 dB, selectable

**Date, time of day**

internal clock, permanently operated from internal battery
--

**Floppy disk drive (ESHS30 only)**

Formatting	3 1/2", 1.44 Mbyte formatted
Data format	MS-DOS-compatible HP-GL or binary

**Connectors and interfaces**

Remote control	to IEC 625-2 (IEEE 488.2)
Remote-control connector	24-contact Amphenol connector via IEC/IEEE-bus interface
Plotter	

**Front-panel outputs**

Supply and coding connector for antennas etc	12-contact Tuchel connector
AF output	Z <sub>out</sub> =10 $\Omega$ , jack JK34
EMF	adjustable up to 2 V

**Generator output (ESHS30 only)**

EMF	N connector, female, 50 $\Omega$ 96 dB $\mu$ V $\pm$ 1 dB
-----	--

**Rear-panel outputs**

IF 74.7 MHz (ESHS10 only)	Z <sub>out</sub> =50 $\Omega$ , BNC connector, female
Gain ref. to RF input (RF attenuation 0 dB)	10 dB without preamplifier, 20 dB with preamplifier
Bandwidth (-3 dB)	> 2 MHz or bandwidth of preselector
IF 80 kHz	Z <sub>out</sub> =50 $\Omega$ , BNC connector, female
EMF in range of analog level display for unmod. sine wave signal:	
Operating range	30 dB 1 to 30 mV 60 dB 1 mV to 1 V
Bandwidth=IF bandwidth	
Video output (envelope detector)	BNC connector, female
EMF in range of analog level display:	
Operating range	30 dB 4 to 126 mV 60 dB 4 mV to 4 V

**User interface**

25-contact Cannon connector; includes 6 control lines for an external device (eg artificial mains network), display voltage (analog) with and without simulation of meter response, input for external triggering, RS-232-C interface for firmware updating parallel interface, 15-contact Cannon connector	
Keyboard connection	DIN connector (5-contact) for MF2 keyboard

**Rear-panel inputs**

Ext. reference frequency	BNC connector, female
Required level	EMF $\geq$ 1 V from 50 $\Omega$
Frequency	5/10 MHz
Ext. battery	3-contact connector
Required voltage	11 to 33 V

**General data**

Rated temperature range	-10 to +55°C (no condensation allowed)
Storage temperature range	-25 to +70°C
ESHS30: temperature range for floppy disk drive	+5 to 50°C
Mechanical stress	shock-tested to MIL-STD-810D (shock spectrum 40 g), vibration-tested to MIL-T-28800D, class 5; complies with IEC Publ. 68-2-6
EMC	to EMC directive of EU (89/336/EEC) and German EMC law
<b>Power supply</b>	
AC supply	100/120/240 V $\pm$ 10%, 230 V +6/-10%, 47 to 420 Hz (80 VA) safety class I to VDE 0411 (IEC 348)
Battery	
Internal (ESHS10 only)	12 V, 10 Ah, operating time approx. 4 h
External	
ESHS10	11 to 33 V, 1.2 A at 24 V, 2.3 A at 12 V
ESHS30	2.1 A at 24 V, 3.9 A at 12 V

Dimensions incl. controls (W × H × D)		
ESHS 10		435 mm × 236 mm × 363 mm
ESHS30		435 mm × 236 mm × 463 mm
Weight		
ESHS 10		21 kg/18 kg with/without batteries
ESHS30		28.6 kg

## Ordering information

### Order designation

EMI Test Receiver ESHS 10	1004.0401.10
EMI Test Receiver ESHS30	1002.9001.30

### Accessories supplied

	power cable, connector for external battery, operating manual, N- to-BNC adapter
ESHS30 in addition	hood for screen

### Recommended extras

#### For interference measurements:

RF Current Probe (9 kHz to 30 MHz)	ESH2-Z1	0338.3516.52
ESHS30: Current Probe 20 Hz to 100 MHz Active Probe (9 kHz to 30 MHz, high-impedance)	EZ-17	0816.2063.02
Passive Probe (9 kHz to 30 MHz, VDE 0876)	ESH2-Z2	0299.7210.52
Four-line Artificial Mains Network (9 kHz to 150 kHz/30 MHz, VDE 0876)	ESH2-Z3	0299.7810.52
Four-line Artificial Mains Network (150 kHz to 30 MHz, 200 A)	ESH2-Z5	0338.5219.52
Double Two-Wire ISN to CISPR22 for unshielded telecommunication ports	ENV 4200	1107.2387.02
Four-Wire ISN to CISPR22 for unshielded telecommunication ports	ENY22	1109.9508.02
Antenna Impedance Converter	ENY41	1110.0175.02
Two-line V-Network	EZ-12	1026.4800.02
V-Network 5 μH    50 Ω	ESH3-Z5	0831.5518.52
Attenuator (20 dB, 10 W)	ESH3-Z6	0836.5016.52
Rod Antenna	ESH2-Z11	0349.7518.52
Rod Antenna (MIL)	HFH2-Z1	0335.3215.52
Loop Antenna (9 kHz to 30 MHz)	HFH2-Z2	0837.1866.54
Loop Antenna (9 kHz to 1 MHz)	HFH2-Z2	0335.4711.52
Inductive Probe	HFH2-Z3	0335.6214.52
Tripod	HFH2-Z4	0338.3016.52
Wooden Tripod (for HFH2-Z6)	HFU-Z	0100.1114.02
Pulse Limiter 9 kHz to 30 MHz	HZ-1	0837.2310.02
Highpass filter 150 kHz	ESH3-Z2	0357.8810.52
	EZ-25	1026.7796.02

### Option

3 additional RJ45 adapter sets for ENY41	ENY4-B1	1109.9950.02
--	---------	--------------

## Other accessories

6-V Lead Acid Storage Battery, maintenance-free, 10 Ah (2 required) (for ESHS 10)			0338.4012.00
Keyboard (English)	PSA-Z1		1009.5001.32
Keyboard (German)	PSA-Z1		1009.5001.31
Headphones			0110.2959.00
Service Manual ESHS 10			1004.0553.24
Service Manual ESHS30			1003.0272.24
Service Kit	EZ-8		0816.1067.02
19" Rack Adapter with front handles	ZZA-95		0396.4911.00
without front handles	ZZA-95.1		0396.9488.00
Set of Front Handles	ZZG-95		0396.5176.00
<b>Cables</b>			
RF Connecting Cable (BNC) (ESH30)			
IEC-bus Connecting Cable			
1 m	PCK		0292.2013.10
2 m	PCK		0292.2013.20
Printer Cable	EZ-11		0816.1767.02
<b>Control Cables for artificial mains networks</b>			
from ESHS to ESH3-Z5,	2 m	EZ-14	1026.5341.02
from ESHS to ESH2-Z5,	2 m	EZ-13	1026.5293.02
from ESHS to ENV4200,	3 m	EZ-21	1107.2087.03
<b>Control Cables for artificial mains networks in shielded cabins (both cables required)</b>			
from ESHS to ESH3-Z5,	2 m	EZ-14	1026.5341.02
	10 m	EZ-6	0816.0683.02
from ESHS to ESH2-Z5,	2 m	EZ-14	1026.5341.02
	10 m	EZ-5	0816.0625.02
from ESHS to ENV4200,	3 m	EZ-21	1107.2087.03
	10 m	EZ-21	1107.2087.10
<b>Feeder Cables for active antennas in shielded cabins (two required)</b>			
3 m	HZ-3		0837.3469.02
10 m	HZ-4		0816.0519.02



**Fax Reply (EMI Test Receivers ESHS)**

- Please send me an offer**
- I would like a demo**
- Please call me**
- I would like to receive your free-of-charge CD-ROM catalog**

Others: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Name: \_\_\_\_\_  
Company/Department: \_\_\_\_\_  
Position: \_\_\_\_\_  
Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
Country: \_\_\_\_\_  
Telephone: \_\_\_\_\_  
Fax: \_\_\_\_\_  
E-mail: \_\_\_\_\_



**ROHDE & SCHWARZ**