


Migrate to the new Agilent MXG X-Series signal generator and generate true performance

The new MXG exceeds the ESG's performance in every category - output power, phase noise, spurious, and low frequency coverage to 9 kHz. Enjoy frequency and amplitude switching speeds that are 10 to 20 times faster, all in a compact, 3.5 inch (89 mm) tall unit. For more information visit www.agilent.com/find/X-Series_SG

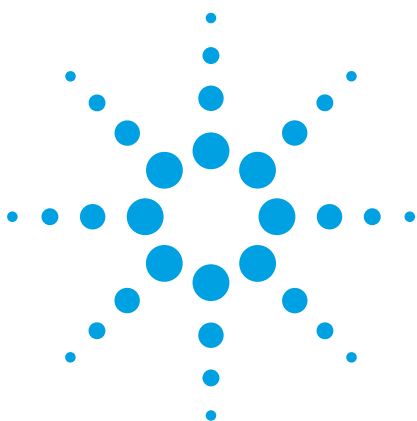

Agilent E4428C ESG Analog Signal Generator

Data sheet



All specifications apply over a 0 to 55 °C range (unless otherwise stated) and apply after a 45 minute warm-up time. Supplemental characteristics, denoted as typical, nominal, or measured, provide additional (non-warranted) information at 25 °C, which may be useful in the application of the product.

Definitions

Specifications: Represents warranted performance.

Typical: Represents characteristic performance which is non-warranted. Describes performance that will be met by a minimum of 80% of all products. All typical values are indicated by parenthesis.

Nominal: Represents characteristic performance which is non-warranted. Represents the value of a parameter that is most likely to occur; the expected mean or average.

Measured: Represents characteristic performance which is non-warranted. Represents the value of a parameter measured on an instrument during design stage.



Agilent Technologies

Table of Contents

Key Features	3
Specifications for Frequency and Power	4
Frequency	4
Sweep modes	4
Internal reference oscillator	4
Output power	5
Spectral purity	9
Specifications for Analog Modulation	11
Frequency bands	11
Frequency modulation	11
Phase modulation	12
Amplitude modulation	13
Wideband AM	14
Pulse modulation	14
Internal analog modulation source	15
External modulation inputs	15
Composite modulation	16
Simultaneous modulation	16
General Characteristics	17
Operating characteristics	17
Accessories	18
Inputs and outputs	18
Ordering Information	21
Related Literature	22

Key Features

Key standard features

- Industry-leading spectral purity
- Superior level accuracy
- High output power
- High-stability timebase
- Wideband FM and Φ M
- Excellent modulation accuracy and stability
- Step and list sweep, both frequency and power
- Built-in function generator
- Lightweight, rack-mountable
- 2-year calibration cycle

Optional performance

- Option 503, frequency range from 250 kHz to 3 GHz (electronic attenuator standard)
 - Option 506, frequency range from 250 kHz to 6 GHz (mechanical attenuator only)
 - Option UNB, higher output with mechanical attenuator
- Note:** Option 506 is standard with the high power mechanical attenuator used in Option UNB, and therefore, both options cannot be ordered together.*
- Option 1EM, move all front panel connectors to rear panel
-

Specifications for Frequency and Power

Frequency

Frequency range				
<i>Option</i>				
503	250 kHz to 3 GHz [electronic attenuator standard]			
506	250 kHz to 6 GHz [mechanical attenuator only]			
Frequency minimum	100 kHz ¹			
Frequency resolution	0.01 Hz			
Frequency switching speed				
	<i>Option 503</i>		<i>Option 506</i>	
	Freq. ²	Freq./Amp. ³	Freq. ²	Freq./Amp. ³
	(< 9 ms)	(< 9 ms)	(< 16 ms)	(< 17 ms)
[For hops < 5 MHz within a band]				
	(< 9 ms)	(< 9 ms)	(< 12 ms)	(< 14 ms)
Phase offset	Phase is adjustable remotely [LAN, GPIB, RS-232] or via front panel in nominal 0.1 ° increments			

Sweep modes

Operating modes	Frequency step, amplitude step and arbitrary list
Dwell time	1 ms to 60 s
Number of points	2 to 65,535 (Step) 2 to 1601 (List)

Internal reference oscillator

Stability	
Aging rate	< ±0.1 ppm/yr or < ±0.0005 ppm/day after 45 days
Temp [0 to 55 °C]	(< ±0.05 ppm)
Line voltage	(< ±0.002 ppm)
Line voltage range	(+5% to -10%)
RF reference input requirements	
Frequency	1, 2, 5, 10 MHz ±0.2 ppm
RF reference output	
Frequency	10 MHz
Amplitude	4 dBm ±2 dB

1. Performance below 250 kHz not guaranteed.

2. To within 0.1 ppm of final frequency above 250 MHz or within 100 Hz below 250 MHz.


3. Frequency switching time with the amplitude settled within ±0.1 dB.

Specifications for Frequency and Power

Output power

Power	Option UNB		
	Option 503	Option 503	Option 506
250 kHz to 250 MHz	+11 to -136 dBm	+15 to -136 dBm	+12 to -136 dBm
> 250 MHz to 1 GHz	+13 to -136 dBm	+17 to -136 dBm	+14 to -136 dBm
> 1 to 3 GHz	+10 to -136 dBm	+16 to -136 dBm	+13 to -136 dBm
> 3 to 6 GHz	N/A	N/A	+10 to -136 dBm

Maximum available power (measured)

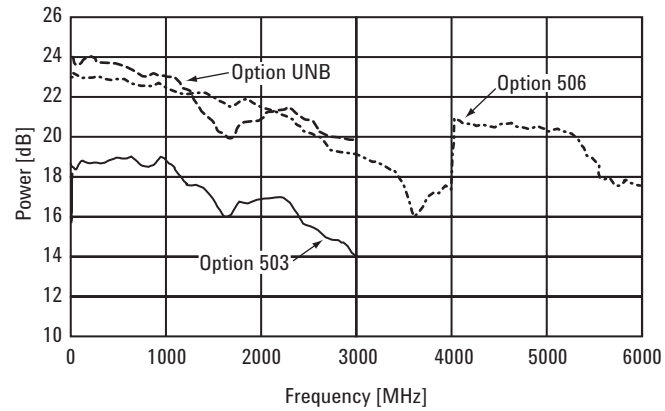

Level resolution 0.02 dB

Level range with Attenuator Hold active

	Option UNB		
	Option 503	Option 503	Option 506
250 kHz to 1 GHz	23 dB	27 dB	24 dB
> 1 to 3 GHz	20 dB	26 dB	23 dB
> 3 to 6 GHz	N/A	N/A	20 dB

Specifications for Frequency and Power

Level accuracy [dB]

Option 503¹



	Power level			
	+7 to -50 dBm	-50 to -110 dBm	-110 to -127 dBm	< -127 dBm
250 kHz to 2.0 GHz	±0.5	±0.5	±0.7	(±1.5)
2.0 to 3 GHz	±0.6	±0.6	±0.8	(±2.5)

Option UNB²

	Power level			
	+10 to -50 dBm	-50 to -110 dBm	-110 to -127 dBm	< -127 dBm
250 kHz to 2.0 GHz	±0.5	±0.7	±0.8	(±1.5)
2.0 to 3 GHz	±0.6	±0.8	±1.0	(±2.5)

Option 506³

	Power level			
	+7 to -50 dBm	-50 to -110 dBm	-110 to -127 dBm	< -127 dBm
250 kHz to 2.0 GHz	±0.6	±0.8	±0.8	(±1.5)
2.0 to 3 GHz	±0.6	±0.8	±1.0	(±2.5)
3 to 4 GHz	±0.8	±0.9	±1.5	(±2.5)
4 to 6 GHz	±0.8	±0.9	(±1.5)	

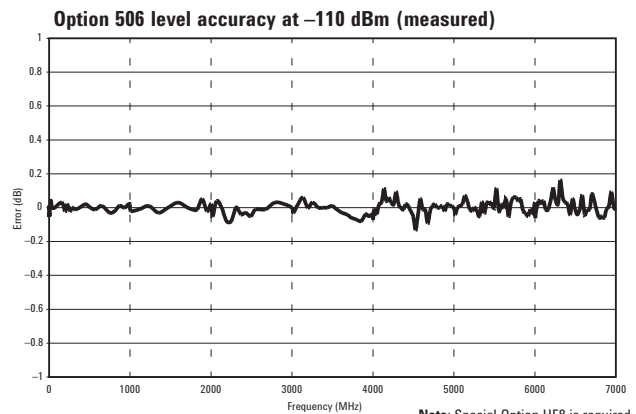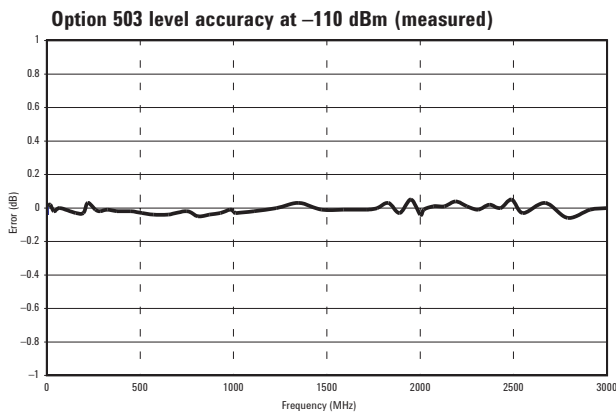

Note: Special Option HF8 is required for frequency capability up to 7 GHz



Level accuracy with ALC off (±0.15 dB) [relative to ALC on]
Conditions: After power search is executed.

Level switching speed	Option UNB		
	Option 503	Option 503	Option 506
Normal operation [ALC on]	(< 15 ms)	(< 21 ms)	(< 21 ms)
When using power search manual	(< 83 ms)	(< 95 ms)	(< 95 ms)
When using power search auto	(< 103 ms)	(< 119 ms)	(< 119 ms)


1. Quoted specifications for 23 °C ±5 °C. Accuracy degrades by less than 0.03 dB/°C over full temperature range. Accuracy degrades by 0.3 dB above +7 dBm, and by 0.8 dB above +10 dBm.
2. Quoted specifications for 23 °C ±5 °C. Accuracy degrades by less than 0.03 dB/°C over full temperature range. Accuracy degrades by 0.2 dB above +10 dBm, and by 0.8 dB above +13 dBm.
3. Quoted specifications for 23 °C ±5 °C. Accuracy degrades by less than 0.02 dB/°C over full temperature range. Accuracy degrades by 0.2 dB above +7 dBm.

Specifications for Frequency and Power

Repeatability and linearity

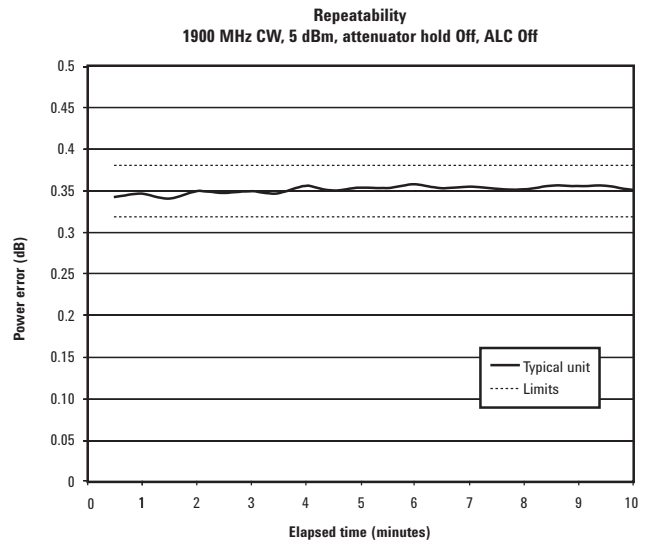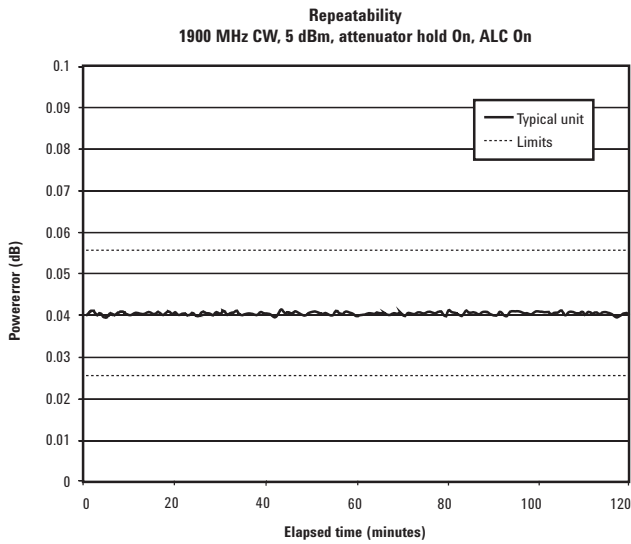


Repeatability measures the ability of the instrument to return to a given power setting after a random excursion to any other frequency and power setting. It is a relative measurement that reflects the difference in dB between the maximum and minimum power readings for a given setting over a specific time interval. It should not be confused with absolute power accuracy, which is measured in dBm.¹

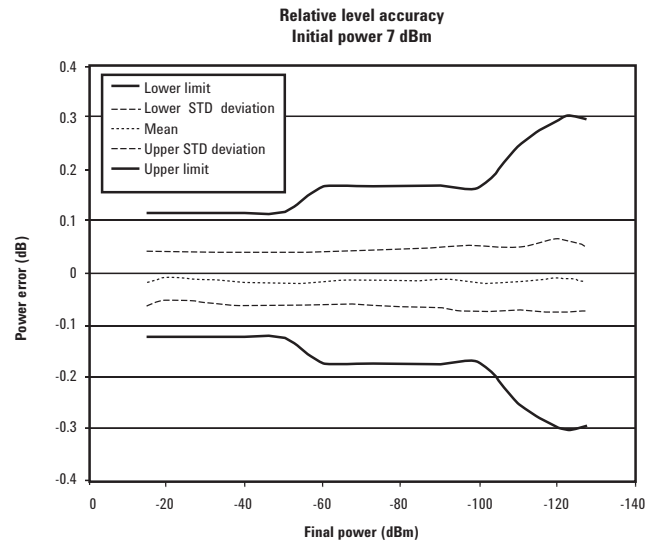



Relative level accuracy measures the accuracy of a step change from any power level to any other power level. This is useful for large changes (i.e. 5 dB steps).¹

1. Repeatability and relative level accuracy are typical for all frequency ranges.

Specifications for Frequency and Power

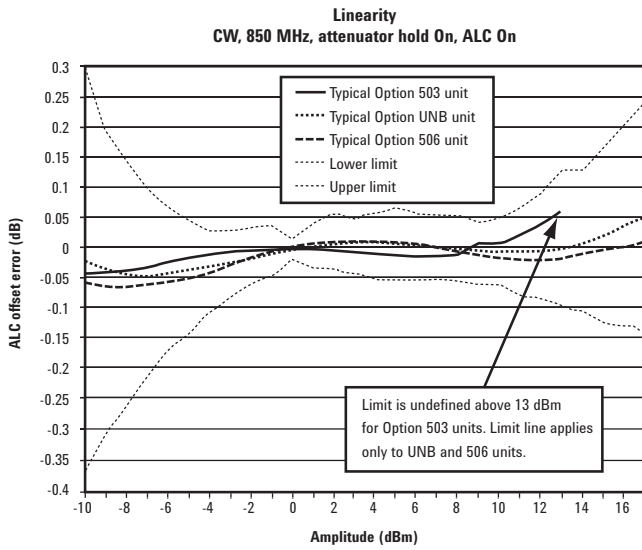

Linearity measures the accuracy of small changes while the attenuator is held in a steady state (to avoid power glitches). This is useful for fine resolution changes.¹

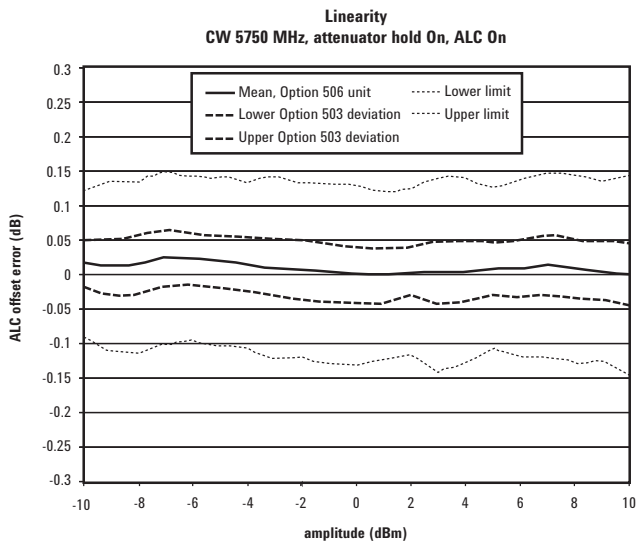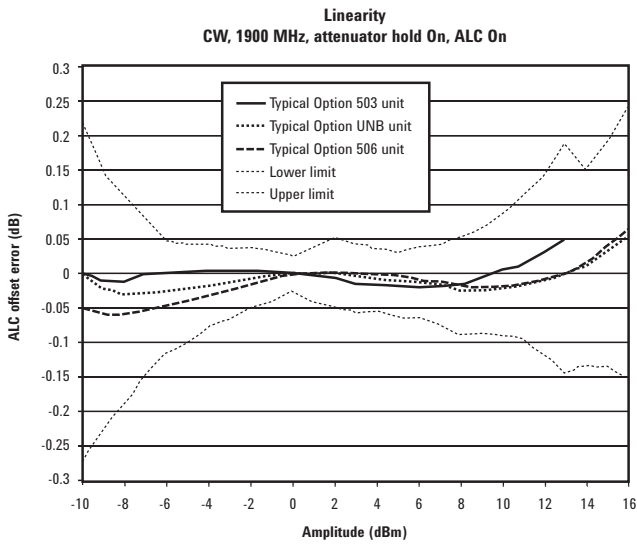

1. Repeatability and relative level accuracy are typical for all frequency ranges.

Specifications for Frequency and Power

Spectral purity

SSB Phase noise [at 20 kHz offset]

at 500 MHz	< -135 dBc/Hz, (< -138 dBc/Hz)
at 1 GHz	< -130 dBc/Hz, (< -134 dBc/Hz)
at 2 GHz	< -124 dBc/Hz, (< -128 dBc/Hz)
at 3 GHz	< -121 dBc/Hz, (< -125 dBc/Hz)
at 4 GHz	< -118 dBc/Hz, (< -122 dBc/Hz)
at 6 GHz	< -113 dBc/Hz, (< -117 dBc/Hz)

Residual FM [CW mode, 0.3 to 3 kHz BW, CCITT, rms]

< N x 1 Hz (< N x 0.5 Hz)¹

Harmonics² [output level ≤ +4 dBm Option 503, ≤ +7.5 dBm Option UNB, ≤ +4.5 dBm Option 506] < -30 dBc above 1 GHz, (< -30 dBc 1 GHz and below)

Nonharmonics³ [≤ +7 dBm output level decreases, ≤ +4 dBm Option 506]⁴

	> 3 kHz offset	> 10kHz offset
250 kHz to 250 MHz	< -65 dBc	(< -58 dBc)
250 MHz to 500 MHz	< -80 dBc	< -80 dBc
500 MHz to 1 GHz	< -80 dBc	< -80 dBc
1 to 2 GHz	< -74 dBc	< -74 dBc
2 to 4 GHz	< -68 dBc	< -68 dBc
4 to 6 GHz	< -62 dBc	< -62 dBc

Subharmonics

≤ 1 GHz	None
> 1 GHz	None

Jitter in μUI ^{5,6}

<i>Carrier frequency</i>	<i>SONET/SDH data rates</i>	<i>rms jitter bandwidth</i>	<i>($\mu\text{UI rms}$)</i>
155 MHz	155 MB/s	100 Hz to 1.5 MHz	(78)
622 MHz	622 MB/s	1 kHz to 5 MHz	(46)
2.488 GHz	2488 MB/s	5 kHz to 15 MHz	(74)

Jitter in seconds

<i>Carrier frequency</i>	<i>SONET/SDH data rates</i>	<i>rms jitter bandwidth</i>	
155 MHz	155 MB/s	100 Hz to 1.5 MHz	(0.6 ps)
622 MHz	622 MB/s	1 kHz to 5 MHz	(74 fs)
2.488 GHz	2488 MB/s	5 kHz to 15 MHz	(30 fs)

1. Refer to frequency bands on page 11 for N values.

2. Harmonic performance outside the operating range of the instrument is typical.

3. Spurs outside the operating range of the instrument are not specified.


4. Specifications apply for CW mode only.

5. Calculated from phase noise performance in CW mode only at -2.5 dBm for Option 503 instruments, -0.5 dBm with Option 506, and +2.5 dBm with Option UNB.


6. For other frequencies, data rates, or bandwidths, please contact your sales representative.

Specifications for Frequency and Power


Characteristic SSB phase noise (measured)

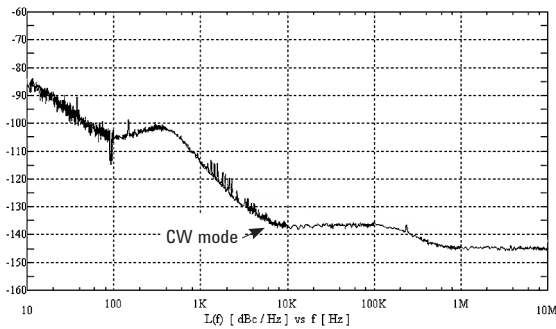


fc = 850 MHz

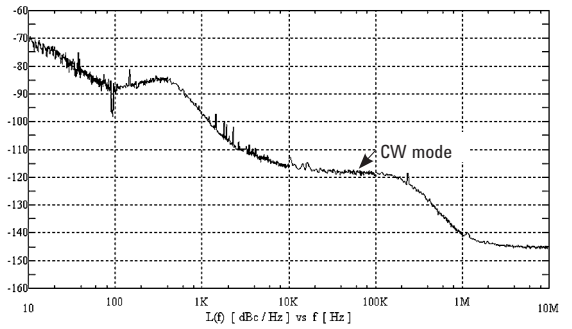


fc = 5.7 GHz [Option 506]

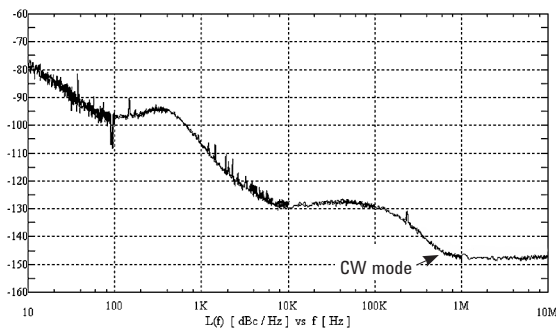


fc = 1900 MHz

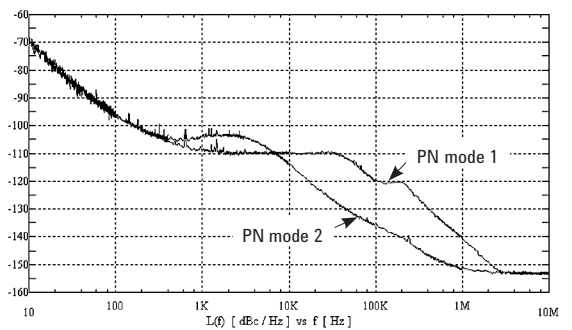

Phase noise modes 1 and 2 at fc = 900 MHz

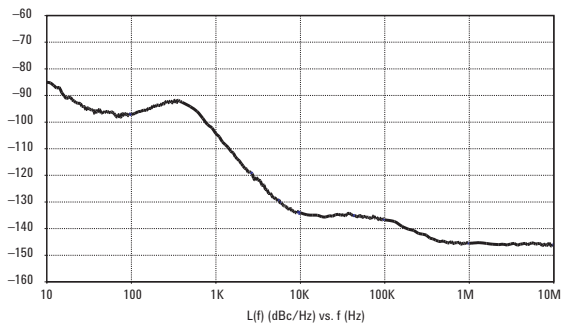

fc = 1000 MHz

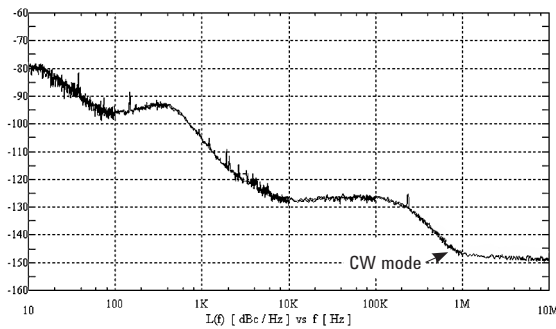

fc = 2200 MHz

Specifications for Analog Modulation

Frequency bands

<i>Band</i>	<i>Frequency range</i>	<i>N number</i>
1	250 kHz to ≤ 250 MHz	1
2	> 250 MHz to ≤ 500 MHz	0.5
3	> 500 MHz to ≤ 1GHz	1
4	> 1 to ≤ 2 GHz	2
5	> 2 to ≤ 4 GHz	4
6	> 4 to ≤ 6 GHz	8

Frequency modulation¹

Maximum deviation²

$N \times 1 \text{ MHz}$

Resolution

0.1% of deviation or 1 Hz,
whichever is greater

Modulation frequency rate [deviation = 100 kHz]

<i>Coupling</i>	<i>1 dB bandwidth</i>	<i>3 dB bandwidth</i>
FM path 1 [DC]	DC to 100 kHz	(DC to 10 MHz)
FM path 2 [DC]	DC to 100 kHz	(DC to 0.9 MHz)
FM path 1 [AC]	20 Hz to 100 kHz	(5 Hz to 10 MHz)
FM path 2 [AC]	20 Hz to 100 kHz	(5 Hz to 0.9 MHz)

Deviation accuracy² [1 kHz rate, deviation < $N \times 100 \text{ kHz}$]

$< \pm 3.5\%$ of FM deviation + 20 Hz

Carrier frequency accuracy relative to CW in DCFM^{2,3}

$\pm 0.1\%$ of set deviation + ($N \times 1 \text{ Hz}$)

Distortion² [1 kHz rate, dev.= $N \times 100 \text{ kHz}$]

< 1%

FM using external inputs 1 or 2

Sensitivity $1 \text{ V}_{\text{peak}}$ for indicated deviation

Input impedance 50Ω , nominal

FM path 1 and FM path 2 are summed internally for composite modulation.
The FM 2 path is limited to a maximum rate of 1 MHz. The FM 2 path must be set to a deviation less than FM 1 path.

1. All analog performance above 3 GHz is typical.

2. Refer to frequency bands on this page to compute specifications.

3. At the calibrated deviation and carrier frequency, within 5 °C of ambient temperature at time of calibration.

Specifications for Analog Modulations

Phase modulation¹

Resolution	0.1% of set deviation		
Modulation frequency response²			
	<i>Maximum deviation</i>	<i>Allowable rates [3 dB BW]</i>	
<i>Mode</i>		<i>ØM path 1</i>	<i>ØM path 2</i>
Normal BW	N x 10 radians	DC to 100 kHz	DC to 100 kHz
High BW	N x 1 radians	(DC to 1 MHz)	(DC to 0.9 MHz)
Deviation accuracy [1 kHz rate, Normal BW mode]			
< ±5% of deviation + 0.01 radians			
Distortion² [1 kHz rate, deviation, < 10N radians, Normal BW mode]			
< 1%			
ØM using external inputs 1 or 2			
Sensitivity	1 V _{peak} for indicated deviation		
Input impedance	50 Ω, nominal		
Paths	ØM path 1 and ØM path 2 are summed internally for composite modulation. The ØM 2 path is limited to a maximum rate of 1 MHz. ØM path 2 must be set to a deviation less than the ØM path 1.		

1. All analog performance above 3 GHz is typical.

2. Refer to frequency bands on page 11 for N.

3. Bandwidth is automatically selected based on deviation.

Specifications for Analog Modulations

Amplitude modulation^{1,2} [fc > 500 kHz]

Range	0 to 100%	
Resolution	0.1%	
Rates [3 dB bandwidth]		
DC coupled	0 to 10 kHz	
AC coupled	10 Hz to 10 kHz	
Accuracy ^{2,3}	1 kHz rate < ±(6% of setting +1%)	
Distortion ^{2,3} [1 kHz rate, THD]		
	<i>Option 503</i>	<i>Option 506</i>
30% AM	< 1.5%	< 1.5%
90% AM	(< 4%)	(< 5%)
AM using external inputs 1 or 2		
Sensitivity	1 V _{peak} to achieve indicated depth	
Input impedance	50 Ω, nominal	
Paths	AM path 1 and AM path 2 are summed internally for composite modulation.	

1. All analog performance above 3 GHz is typical.

2. AM is typical above 3 GHz.

3. Peak envelope power of AM must be 3 dB less than maximum output power below 250 MHz.

Specifications for Analog Modulation

Pulse modulation

On/off ratio	
≤ 4 GHz	> 80 dB
> 4 GHz	(> 64 dB)

Rise/fall times	(150 ns)
------------------------	----------

Minimum width	
ALC on	(2 μs)
ALC off	(0.4 μs)

Pulse repetition frequency	
ALC on	(10 Hz to 250 kHz)
ALC off	(DC to 1.0 MHz)

Level accuracy ¹	[relative to CW at ≤ 4 dBm Option 503, ≤ 7.5 dBm Option UNB, ≤ 4.5 dBm Option 506] ($< \pm 1$ dB)
------------------------------------	--

Pulse modulation using external inputs	
Input voltage	
RF on	> +0.5 V, nominal
RF off	< +0.5 V, nominal
Input impedance	50 Ω, nominal

Internal pulse generator	
Square wave rate	0.1 Hz to 20 kHz
Pulse	
Period	8 μs to 30 seconds
Width	4 μs to 30 seconds
Resolution	2 μs

1. With ALC off, specifications apply after the execution of power search. With ALC on, specifications apply for pulse repetition rates ≤ 10 kHz and pulse widths ≥ 5 μs.

Specifications for Analog Modulation

Internal analog modulation source

[Provides FM, AM, pulse, and phase modulation signals and LF audio out]

Waveforms	sine, square, ramp, triangle, pulse, noise
Rate range	
Sine	0.1 Hz to 100 kHz
Square, ramp, triangle	0.1 Hz to 20 kHz
Resolution	0.1 Hz
Frequency accuracy	same as RF reference source
Swept sine mode [frequency, phase continuous]	
Operating modes	Triggered or continuous sweeps
Frequency range	0.1 Hz to 100 kHz
Sweep time	1 ms to 65 sec
Resolution	1 ms
Dual sinewave mode	
Frequency range	0.1 Hz to 100 kHz
Amplitude ratio	0 to 100%
Amplitude ratio resolution	0.1%
LF audio out mode	
Amplitude	0 to 2.5 V _{peak} into 50 Ω
Output impedance	50 Ω nominal
Noise	Noise with adjustable amplitude generated as a peak-to-peak value (RMS value is approximately 80% of displayed value)

External modulation inputs

Modulation types	
Ext 1	FM, ØM, AM, pulse
Ext 2	FM, ØM, AM, and pulse
High/Low Indicator [100 Hz to 10 MHz BW, AC coupled inputs only]. Activated when input level error exceeds 3% [nominal].	

Specifications for Analog Modulation

Composite modulation

AM, FM, and \emptyset M each consist of two modulation paths which are summed internally for composite modulation. The modulation sources may be any two of the following: Internal, External 1, External 2.

Simultaneous modulation

Multiple modulation types may be simultaneously enabled. For example, AM, and FM can run concurrently and all will affect the output RF. This is useful for simulating signal impairments. There are some exceptions: FM and \emptyset M cannot be combined. Two modulation types cannot be generated simultaneously by the same modulation source.

General Characteristics

Operating characteristics

Power requirements	90 to 254 V; 50 or 60 Hz; 300 W maximum, power factor corrected. Not for 400 Hz use. ¹		
Operating temperature range²	0 to 55 °C		
Storage temperature range	–40 to 70 °C		
Shock and vibration	Meets MIL-STD-28800E Type III, Class 3.		
Leakage	<p>Conducted and radiated emissions conform to CISPR 11.</p> <p>Leakage is typically < 1 µV [nominally 0.1 µV with a 2-turn loop] at ≤ 1000 MHz, measured with a resonant dipole antenna, one inch from any surface with output level < 0 dBm [all inputs/outputs properly terminated].</p>		
Storage registers	Memory is shared by instrument states, user data files, sweep list files and waveform sequences. Depending on the number and size of these files, up to 100 storage registers and 1000 register sequences [10 per register] are available.		
Weight	< 16 kg [35 lb.] net, < 23 kg [50 lb.] shipping		
Dimensions	133 mm H x 426 mm W x 432 mm D [5.25 in H x 16.8 in W x 17 in D]		
Remote programming			
Interface	GPIB [IEEE-488.2-1987] with listen and talk, RS-232, LAN [10BaseT].		
Control languages ³	SCPI version 1996.0, also compatible with 8662A, 8663A, 8656B and 8657A/B/C/D/J1 mnemonics.		
Functions controlled	All front panel functions except power switch and knob.		
ISO compliant	The E4428C ESG is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies commitment to quality.		
Reverse power protection			
	<i>Option 503</i>	<i>Option 506</i>	
250 kHz to 2 GHz	47 dBm	30 dBm	
> 2 to 4 GHz	44 dBm	30 dBm	
> 4 to 6 GHz	N/A	30 dBm	
Max DC voltage	40 V		
SWR			
	<i>Option 503</i>	<i>Option UNB</i>	<i>Option 506</i>
250 kHz to 2.2 GHz	(< 1.5:1)	(< 1.5:1)	(< 1.6:1)
> 2.2 GHz to 3 GHz	(< 1.4:1)	(< 1.5:1)	(< 1.4:1)
> 3 GHz to 4 GHz	(< 1.5:1)	(< 1.7:1)	(< 1.7:1)
> 4 GHz to 6 GHz	N/A	N/A	(< 1.8:1)
Output impedance	50 Ω nominal		

1. For 400 Hz systems, order transformer 70001-60066.

2. Save and recall of user files and instrument states from non-volatile storage is guaranteed only over the range 0 to 40 °C.

3. ESG series does not implement 8657A/B “Standby” or “On” [R0 or R1, respectively] mnemonics.

General Characteristics

Accessories

Transit case	Part number 9211-1296
Inputs and outputs All front panel connectors can be moved to rear with Option 1EM.	
10 MHz input	Accepts a 1, 2, 5, or 10 MHz ± 0.2 ppm. Nominal input level -3.5 to $+20$ dBm, impedance 50 ohms. [BNC, rear panel]
10 MHz output	Outputs the 10 MHz reference signal. Level nominally $+3.9$ dBm ± 2 dB. Nominal output impedance 50 ohms. [BNC, rear panel]
External 1 input	This BNC input connector accepts a $\pm 1 V_{\text{peak}}$ signal for AM, FM, pulse, and phase modulation. For all these modulations, $\pm 1 V_{\text{peak}}$ produces the indicated deviation or depth. When ac-coupled inputs are selected for AM, FM, or phase modulation and the peak input voltage differs from $1 V_{\text{peak}}$ by more than 3%, the hi/lo annunciator light on the display. The input impedance is 50 ohms and the damage levels are $5 V_{\text{rms}}$ and $10 V_{\text{peak}}$. If you configure your signal generator with Option 1EM, this input is relocated to a female BNC connector on the rear panel.
External 2 input	This BNC input connector accepts a $\pm 1 V_{\text{peak}}$ signal for AM, FM, phase modulation, and pulse modulation. With AM, FM, or phase modulation, $\pm 1 V_{\text{peak}}$ produces the indicated deviation or depth. With pulse modulation, $+1 V$ is on and $0 V$ is off. When ac-coupled inputs are selected for AM, FM, or phase modulation, and the peak voltage differs from $1 V_{\text{peak}}$ by more than 3%, the hi/lo annunciator light on the display. The input impedance is 50 ohms and the damage levels are $5 V_{\text{rms}}$ and $10 V_{\text{peak}}$. If you configure your signal generator with Option 1EM, this input is relocated to a female BNC connector on the rear panel.
GPIB	Allows communication with compatible devices. [rear panel]
LF output	Outputs the internally-generated LF source. Outputs 0 to $2.5 V_{\text{peak}}$ into 50 ohms, or 0 to $5 V_{\text{peak}}$ into high impedance. [BNC, front panel]
RF output	Nominal output impedance 50 ohms. [type-N female, front panel]
Sweep output	Generates output voltage, 0 to $+10 V$ when signal generator is sweeping. Output impedance < 1 ohm, can drive 2000 ohms. [BNC, rear panel]
Trigger input	Accepts CMOS ¹ signal for triggering point-to-point in manual sweep mode, or to trigger start of LF sweep. The damage levels are -0.5 to $+5.5 V$. [BNC, rear panel]
Trigger output	Outputs a TTL signal: high at start of dwell, or when waiting for point trigger in manual sweep mode; low when dwell is over or point trigger is received, high or low $2 \mu\text{s}$ pulse at start of LF sweep. [BNC, rear panel]

1. Rear panel inputs and outputs are 3.3 V CMOS, unless indicated otherwise. CMOS inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels.

General Characteristics

LAN connector

LAN communication is supported by the signal generator via the LAN connector. It is functionally equivalent to the GPIB connector. The LAN connector enables the signal generator to be remotely programmed by a LAN-connected computer. The distance between a computer and the signal generator is limited to 100 meters [10BaseT]. For more information about the LAN, refer to the *Getting Started* chapter in the *Programming Guide*.


Data transfer speeds

LAN [FTP]	file transfer to volatile memory	(700 KB/sec)
	to hard drive	(500 KB/sec)
LAN [SCPI]	command transfer to volatile memory	(146 KB/sec)
	to hard drive	(128 KB/sec)
Internal file transfer from hard drive to volatile memory		(1280 KB/sec)

RS-232 connector

This male DB-9 connector is an RS-232 serial port that can be used for controlling the signal generator remotely. It is functionally equivalent to the GPIB connector. The following table shows the description of the pinouts. The pin configuration is shown below.

Pin number	Signal description	Signal name
1	No connection	
2	Receive data	RECV
3	Transmit data	XMIT
4	+5 V	
5	Ground, 0 V	
6	No connection	
7	Request to send	RTS
8	Clear to send	CTS
9	No connection	



View looking into rear panel connector

Ordering Information¹

Frequency options

-
- E4428C-503 250 kHz to 3 GHz frequency range [electronic attenuator standard]
 - E4428C-506 250 kHz to 6 GHz frequency range [mechanical attenuator only]

Performance enhancement options

-
- E4428C-UNB High output power with mechanical attenuator
Note: *Option 506 is standard with the high power mechanical attenuator used in Option UNB, and therefore, both options cannot be ordered together.*
 - E4428C-1EM Moves all front panel connectors to rear

Manual and accessories

-
- E4428C-1CM Rack mount kit without handles
 - E4428C-1CP Rack mount kit with handles
 - E4428C-1CN Front handle kit
 - E4428C-CD1 CD-ROM of English user guide and assembly level service manual (standard with instrument)
 - E4428C-ABA Printed English documentation set
 - E4428C-0BW Service documentation, assembly level
 - E4428C-UK6 Commercial calibrations certificate with test data

Warranty and calibration plans

For more information, please visit: www.agilent.com/find/removealldoubt.

- Extended return-to-Agilent warranty and service
- Agilent calibration upfront plan
- Agilent calibration plus upfront plan
- Z540 calibration upfront plan

1. All options should be ordered using E4428C-xxx, where the xxx represents the option number.

Related Literature

-
- *Signal Generator Spectral Purity Considerations in RF Communications Testing, Application Note 388*, Literature Number 5952-2019.
 - *RF Source Basics, a self-paced tutorial (CD-ROM)*, Literature Number 5980-2060E.
 - *IntuiLink Software, Data Sheet*, Literature Number 5980-3115EN.
 - *Security of Agilent Signal Generators: Issues and Solutions, Application Note*, Literature Number 5989-1091EN.

Additional Resources

See the ESG Web page

Get the latest news, product and support information, application literature, firmware upgrades and more. Agilent's Internet address for the ESG is:

www.agilent.com/find/esg



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012

Published in USA, May 21, 2012
5989-1992EN



Agilent Technologies