

Agilent 54645D


Mixed Signal Oscilloscope

Product Overview

- **Dual-channel 100-MHz scope with 200 MSa/s**
- **1 MB of memory per scope channel**
- **16 logic timing channels with 400 MSa/s on 8 channels (2 MB memory/ch) 200 MSa/s on 16 Channels (1 MB memory/ch)**
- **Ideal for debugging 8- or 16-bit microcontroller systems**
- **MegaZoom technology for easy-to-use responsive deed memory**
- **Simple easy-to-use controls**
- **Powerful triggering**

New mixed-signal testing power

With the introduction of the Agilent Technologies 54645D mixed-signal oscilloscope (MSO) to your lab, you will be able to easily view the complex relationships of your circuit's analog and digital operation. Seamless integration of scope and logic channels in the 54645D MSO allow you to view both the analog circuit operation on the two 100 MHz scope channels and the logic timing displayed on the 16 logic channels. Analog and digital events are aligned in time so that you can easily relate cause and effect in many difficult mixed-signal troubleshooting situations, such as those encountered in debugging 8- or 16-bit microcontroller systems.

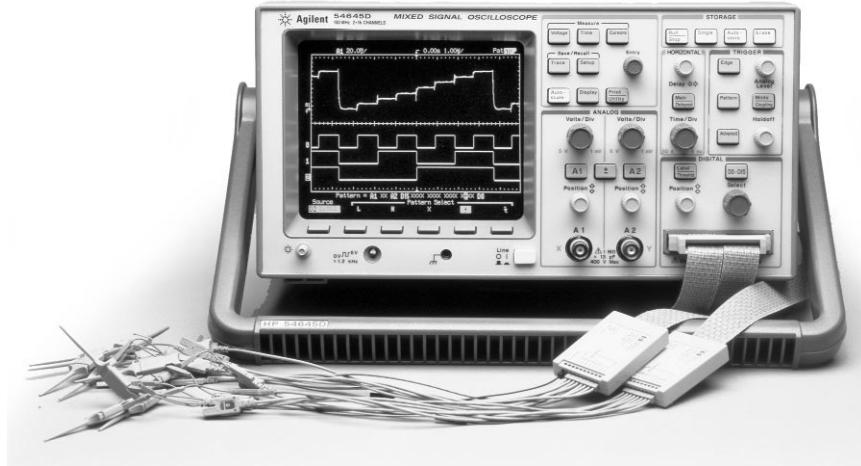

The 54645D gives you an oscilloscope-like operation of both the scope and logic channels. For example, simply turn the time-base knob to set the time/division for all scope and logic channels. Press Autoscale for the display of all active analog (scope) and digital (logic) channels. There is no scope-logic mode switch, just a seamless integration of logic channels into a scope.

Agilent MegaZoom Technology

When you try to view analog and digital signals, the events of interest either take place over a long time span or they are widely separated from the trigger event. With 1 million samples per channel, MegaZoom technology captures long time spans while maintaining the high sample rate, allowing you to see the fine detail needed to solve elusive problems.

Before the introduction of the 54645D MSO with MegaZoom technology, deep-memory oscilloscopes were considered specialized tools because of their complex operation, non-responsive control panel, and excessive dis-

play dead time. These problems have been greatly reduced with the development of MegaZoom technology, which uses multiple processors optimized for the task of waveform acquisition, storage, and display. Now you can have a deep memory scope in your lab that is also a scope you will use every day, as it is a deep-memory scope that responds instantly to your control inputs, has a high speed, low dead time display and deep memory with easy-to-use pan-and-zoom.

With an easy-to-use control system, the 54645D MSO provides the triggering power you need to troubleshoot problems. You will find it ideally suited for everyday use because of its familiar scope edge triggering mode. This familiar scope mode is the one that can be used to solve most of your problems, as you can trigger on a rising or falling edge on any of the MSO's 18 input channels.

Pattern triggering is provided in the 54645D MSO. This triggering mode allows you to establish a trigger pattern of high, low, and "don't care" levels across all 18 of its channels.



Agilent Technologies

Innovating the HP Way

The advanced mode gives you the choice of glitch, TV, and advanced pattern triggering. In the glitch mode, the 54645D MSO can search for a glitch that is less than a specified width on any of its 18 input channels, allowing you to find abnormally short pulses that may indicate circuit failures. In addition you can search for a pulse that is greater than a specified width or within upper and lower limits.

In advanced pattern trigger mode, the 54645D MSO will search for a combination of two trigger pattern terms. These terms may be combined in one of several Boolean relationships (AND, OR, THEN).

Specifications

Vertical System

Scope Channels:	CH 1 and 2
Bandwidth (3dB)	dc to 100 MHz @ ≥ 10 mv/div (> 75 MHz @ < 10 mv/div)
ac coupled	1.5 Hz to 100 MHz
Risetime	≈ 3.5 ns @ > 10 mv/div, (calculated) (< 4.6 ns @ < 10 mv/div)
Dynamic Input Range	± 32 V or ± 8 div whichever is less
Math Functions	channel 1 + or - channel 2
Input Resistance	1 Mohm
Input Capacitance	≈ 13 pf
Maximum Input	400V (dc + peak ac)
Range	1mV/div to 5V/div
Vertical Gain Accuracy	$\pm 1.5\%$ full scale
Vernier	Fully calibrated, accuracy $\pm 3\%$ full scale
Single Cursor Accuracy	Vertical gain accuracy $\pm 1\%$ full scale $\pm 0.5\%$ position value
Dual Cursor Accuracy	Vertical gain $\pm 0.8\%$ full scale
BW Limit	Approx. 20 MHz
Coupling	ac, dc, GND
Channel Isolation	dc to 20 MHz > 40 dB (with channels at same v/div) 20 MHz to 100 MHz > 30 dB
Inversion	Channel 1 and Channel 2

In TV mode the 54645D MSO may be triggered on field 1, field 2, or line of a composite TV waveform.

Computer and hardcopy I/O

For connection to your PC, printer, or workstation, the 54645D is fully compatible with the full line of 546XX interface modules. Select the module that best fits your needs and you are ready to either print the screen or interface to your PC or workstation. With the addition of the 54657A or 54659B Measurement/Storage module you will have both the interface capabilities described above, as well as additional measurements such as FFT.

Logic Channels

16 channels (0-15) in two pods of 8 channels each	
Maximum Input Voltage	± 40 volts peak
Threshold Range	± 6.0 volts in 50 mV increments
Threshold Accuracy	$\pm (100$ mV + 3% of threshold setting)
Input Dynamic Range	± 10 Volts about threshold
Minimum Input Voltage Overdrive	To meet the timing specifications the threshold value must be within 20% of the 50% voltage point of the input signal
Minimum Input Voltage Swing	500 mV peak to peak
Input Resistance	100 K Ω
Input Capacitance	Approx 8 pF
Channel-to-Channel Skew	2 ns typical, 3 ns max
Pre-defined Thresholds	TTL = 1.4V, CMOS = 2.5V, ELC = -1.3V

Horizontal System, Scope & Logic Channels

Sweep Speeds	50s/div to 5 ns/div main and delayed
Accuracy	$\pm 0.01\%$
Vernier	Accuracy = $\pm 0.05\%$
Horizontal Resolution	40 ps

Scope Cursor Accuracy

Single Channel	Horizontal accuracy $\pm 0.2\%$ screen width ± 40 ps
Channel to Channel	Horizontal accuracy $\pm 0.2\%$ screen width ± 80 ps

Software for enhanced connectivity

With the addition of HP BenchLink Scope software for Microsoft® Windows™, you have the ability to easily interface this powerful instrument to your PC. This versatile software, which is compatible with Windows 3.1, 95 or NT, makes the movement of waveform data or trace images fast and easy.

Built to last

The 54645D MSO is designed and built to the rugged requirements of MIL-T-28800. This means that the product is built to withstand the rigors of daily use as you test and debug your circuits, backed up with a three-year warranty.

Logic Cursor Accuracy

Single Channel	Horizontal accuracy $\pm 0.2\%$ screen width ± 1 logic sample period
Channel to Channel	Horizontal accuracy $\pm 2\%$ screen width ± 1 logic sample period \pm chan-to-chan skew < 10 ppm
Delay Jitter	< 10 ppm

Delay Range

Pre-trigger (negative delay): At least 1 screen width or 2.5 msec
Post trigger (from trigger point to end of sweep): 500 seconds

Delayed Sweep

Delayed timebase can be as fast as 5 nsec/div but must be at least 2X the main timebase. Delayed sweep display is the same data acquisition as was the main.

MegaZoom technology (Post acquisition Pan and Zoom): The time/div and delay controls allow any part of the acquired waveform display to be expanded to the full extent of the memory available.

Trigger System

Modes	Auto, Autolevel, Normal, and Single
Holdoff	≈ 200 ns to ≈ 25 seconds
Edge Triggering	Rising or falling on any of the 18 input channels

Pattern Triggering	A pattern of high, low, and don't care levels and a rising or falling edge can be established across all 18 channels. The analog channel's high level is defined by that channel's trigger level.
Advanced Triggering	Selectable as glitch, advanced pattern, or TV
Glitch	Less than, greater than, or within specified range
Source	Any of the 18 input channels
Polarity	Rising or falling
Minimum Pulse Width Setting	8 ns
Advanced Pattern	Up to two trigger terms (P1 and P2) and two edge terms (E1 and E2) may be established and these terms can be combined as follows: AND, OR, Then, Entered, Exited, Duration <, Duration >, Duration range.
TV	Available on scope channels only
TV Line and Field	0.5 divisions of composite sync required for stable display

Oscilloscope Analog Triggering

Sensitivity	DC to 25 MHz > 10 mV/div ≤ 3.5 div or 3.5 mV < 10 mV/div ≤ 1 div or 2 mV 25 MHz to 100 MHz > 10 mV/div ≤ 1 div or 10 mV < 10 mV/div, ≤ 1.5 div or 3 mV
-------------	---

Sources CH 1, CH 2, and line

Coupling

dc, ac, HF reject, LF reject, noise reject
HF reject and LF reject -3dB @ 50 kHz.

XY

Bandwidth	100 MHz
Phase error @ 1 MHz	1.8 degrees

Acquisition System

Maximum Display Rate	3 million samples per second with sufficient trigger rate, and vectors off. 60 full screens per second, vectors on
----------------------	--

Average	Selectable as smoothing, 4, 8, 16, 32, 64, 128, and 256 averages
Roll Mode	At sweep speeds of 200 ms/div and slower, data moves across the display from right to left with no dead time.

Oscilloscope Acquisition System

Maximum Sampling Rate	200 MSa/s on each channel
Single Shot Bandwidth	50 MHz
Simultaneous capture on both channels	
Vertical Resolution	8 bits
Peak Detection	Can capture and display a pulse at least 5 nsec wide at any time-base setting
Maximum Memory Depth	1 MB samples per channel

Logic Acquisition System

Vertical Resolution	1 bit
Maximum Sampling Rate	400 MSa/s on one pod, 200 MSa/s on two pods
Simultaneous capture on all channels	
Peak Detection	Will capture and display a pulse at least 5 nsec wide at any time-base setting
Maximum Memory Depth	2 MB samples per channel on one pod, 1 MB samples when both pods are used

Display System

Display	7-inch raster monochrome CRT
Resolution	255 vertical by 500 horizontal points
Controls	Front-panel intensity
Vectors	Selectable on/off
Graticle	8 x 10 grid, frame, and none

Advanced Features

Automatic Measurements	(Measurements are continuously updated, markers indicate measurement)
Voltage	V_{AVG} (dc), V_{RMS} , V_{PP} , V_{MIN} , V_{MAX} , V_{TOP} , and V_{BASE}
Time	Frequency, period, + pulse width, - pulse width, duty cycle, rise time and fall time (rise time and fall time are scope only)

Cursors	Manually or automatically placed read out of time, 1/time, voltage. Additionally logic channels can be displayed as binary or hex values.
---------	---

Setup Functions

Autoscale	Finds and displays all active scope and logic channels, sets edge trigger mode on highest numbered channel, sets vertical sensitivity on scope channels and thresholds on logic channels, time base to display 1.8 periods
Save/Recall (non-volatile)	10 set-ups can be saved and recalled from non-volatile memory
Trace Trace (pixel) Memory	2 volatile
User-Defined Channel Labels	All channels may be assigned a user defined label of up to 6 characters. Labels displayed in place of 1st division of wave form

General

Calibrator Output:	
Frequency	≈ 1.2 kHz
Amplitude	5V

EMI

Commercial Mil-T-28800D	Meets FTZ 1046 class B Meets requirements in accordance with paragraph 3.8.3 EMI Type III, and MIL-STD-461C as modified by table XII.
-------------------------	--

CE01, CE03	Yes
CS01, CS02, CS06	Yes
RE01	15 dB relaxation to 20 kHz; exception from 20 kHz to 50 kHz
RE02 (with Opt 002)	Full limits of class A1c and A1f
RE02 (without OPT 002)	10 dB relaxation from 14 kHz to 100 kHz
RS02	Exceptioned
RS03 (with OPT 001)	Slight trace shift from 80 Mhz to 200 mHz

General Information

Size	35.258 x 17.272 x 31.75 cm, 12.7W x 6.8H x 12.5D in (excluding handle)
Weight	≈ 6.35 kgs (14 lbs)
Power Usage	≈ 90 W
Voltage	88-250 VAC
Line Voltage selection	Automatic
Frequency	45-440 Hz

Environmental Characteristics

This instrument meets the requirements of MIL-T-28800D for Type III, Class 3 Style D equipment as described below.

Shock: Agilent class B1 and MIL-T-28800 style D, Class 3 operating: 30g, 1/2 sine, 11 ms duration, 3 shocks per axis along major axis. Total of 18 shocks.

Vibration Operations: 15 minutes along each of 3 major axes; 0.64 mm (0.025 inch) p-p displacement, 10 Hz to 55 Hz in one-minute cycles. Held for 10 minutes at 55 Hz (4 g at 55 Hz).

Altitude: Operating to 4500 M (15,000 ft), non-operating to 15,000 M (50,000 ft).

Humidity: Operating 95% RH at 40°C, 24 hrs, Non-operating 90% RH at 65°C, 24 hrs
Ambient temperature: Operating -10°C to 55°C, non-operating -51°C to +71°C

Safety: CSA Certification, IEC 348

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

"Our Promise" means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

"Your Advantage" means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Get assistance with all your test and measurement needs at:
www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

Copyright © 1998, 2000 Agilent Technologies
Printed in U.S.A. 5/00
5968-2610EN

Ordering Information

54645D Mixed Signal Oscilloscope

Accessories included

Two each Agilent 10074A 10:1 divider probes with readout; 10089A 16 channel logic input probe assembly; Removable front panel ground connector; User's Guide and service manual; power cord.

Accessories and Options Available

Opt. 001 RS-02 magnetic interference shielding added to the CRT
Opt. 002 RE-02 Display shield added to the CRT to reduce radiated interference
OPT 101 10098A Front panel cover and pouch kit
OPT 103 54645A Customer training kit
OPT 104 1185A Carrying case
OPT 106 34810B HP BenchLink Scope software
OPT 1CM 5062-7345 Rack mount kit
OPT W50 Additional two years of warranty
10074A 10X probe with readout
10070A 1X probe
10085A 16:16 logic cable and termination
10089A 16:2 x 8 logic input probe assembly

Modules Fully Supported

* 54650A, GPIB I/O
* 54652B RS-232 and Centronics I/O
* 54657A GPIB Measurement/storage
* 54659B RS-232 and Centronics Measurement/storage
* E2657A GPIB Connectivity kit
* E2658A RS-232 Connectivity kit

* includes measurement/storage module, BenchLink Scope and cable.

Microsoft © Windows™ is a trademark of Microsoft Corporation.



Agilent Technologies

Innovating the HP Way